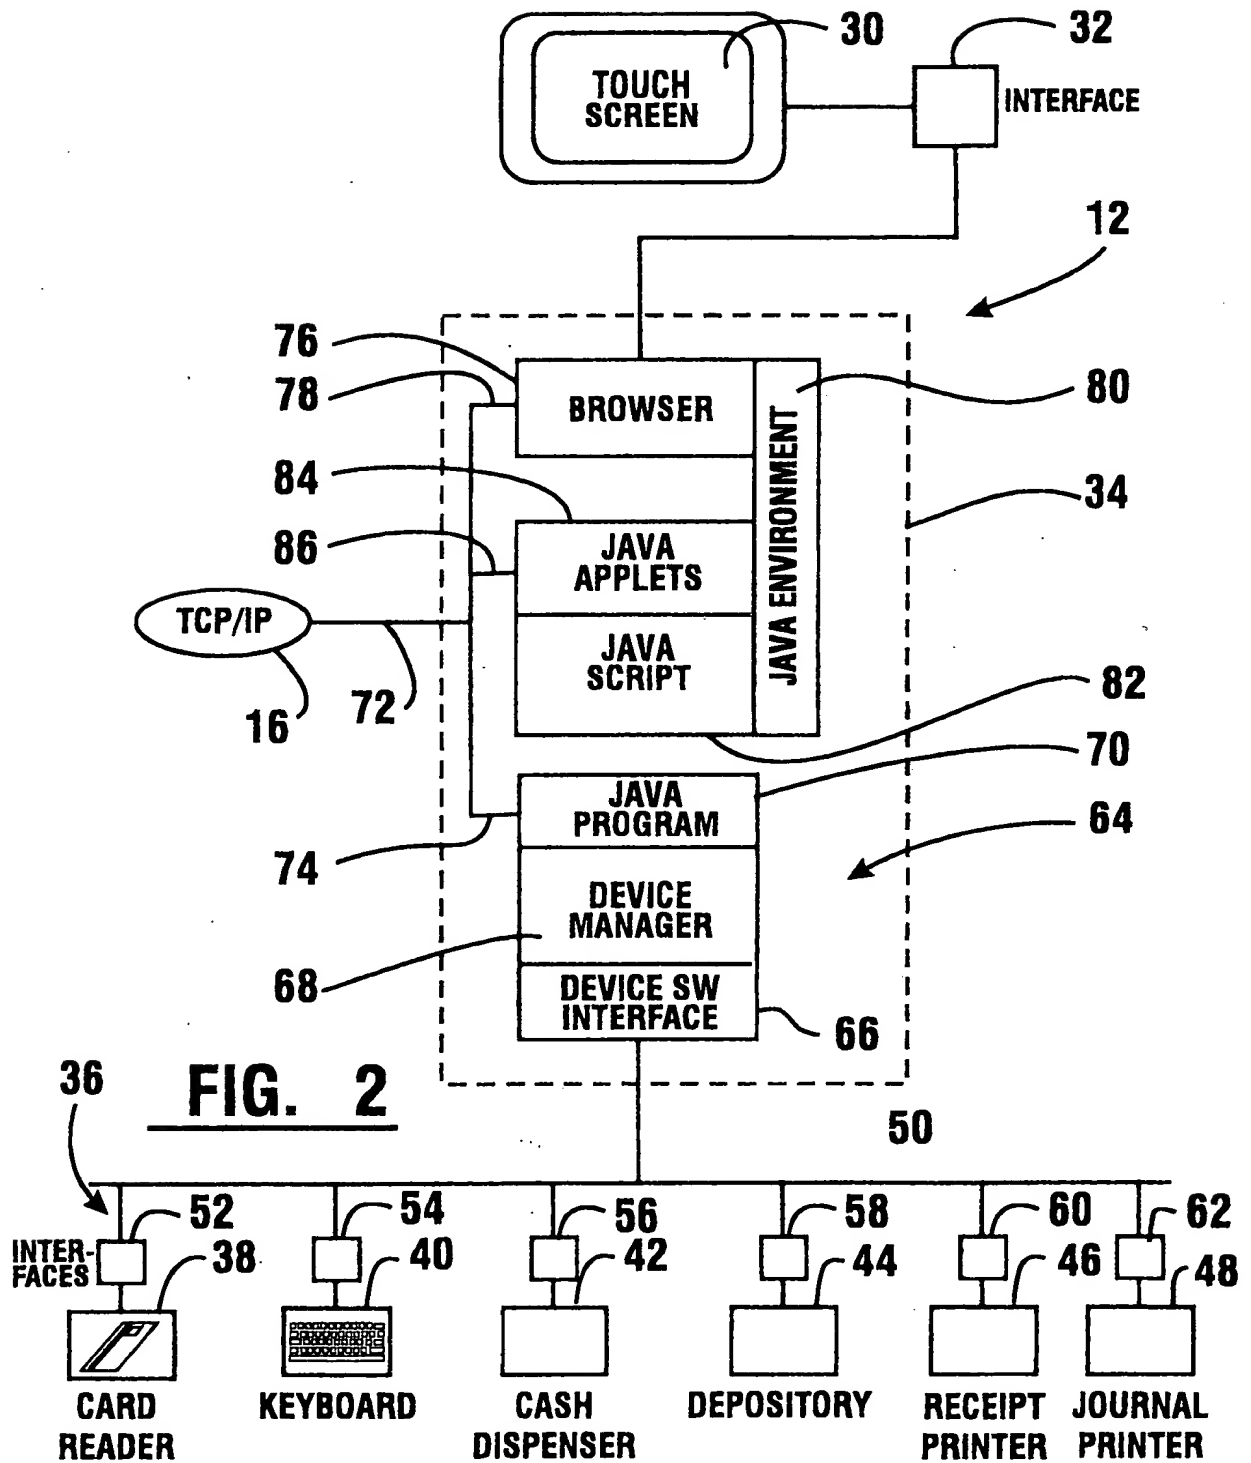


FIG. 1

001780" 81666960



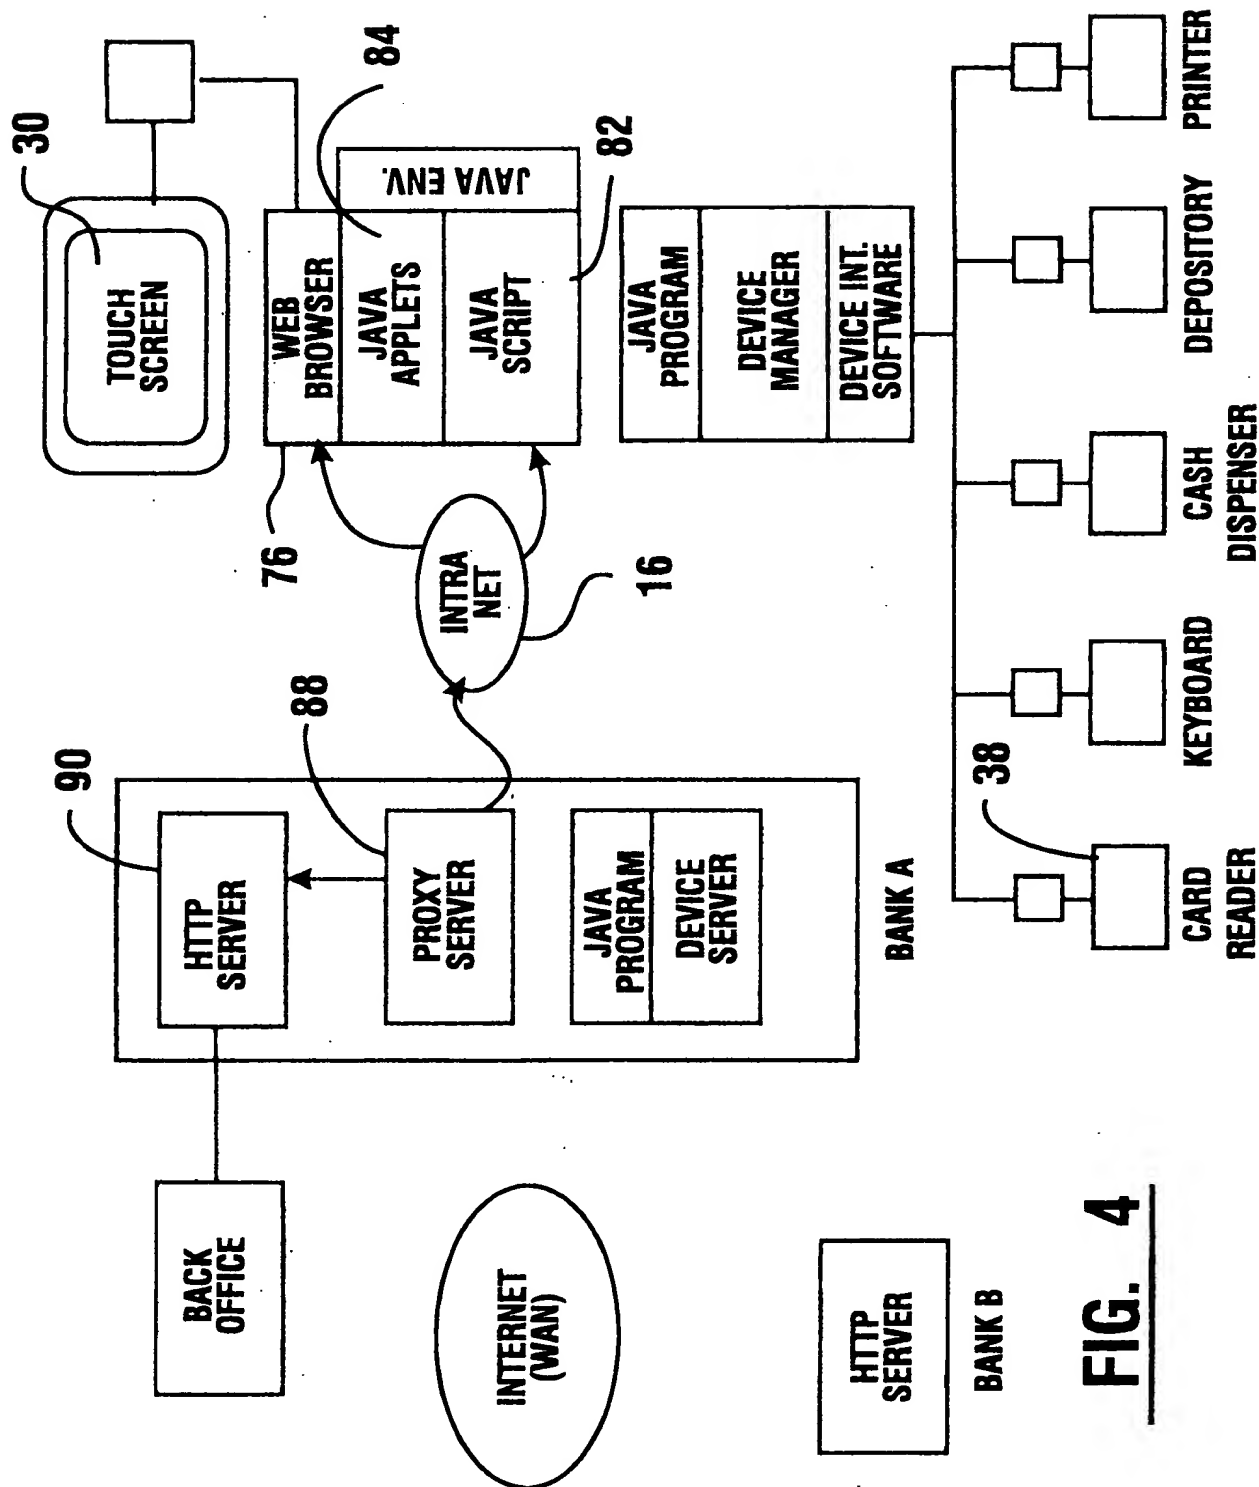


FIG. 4

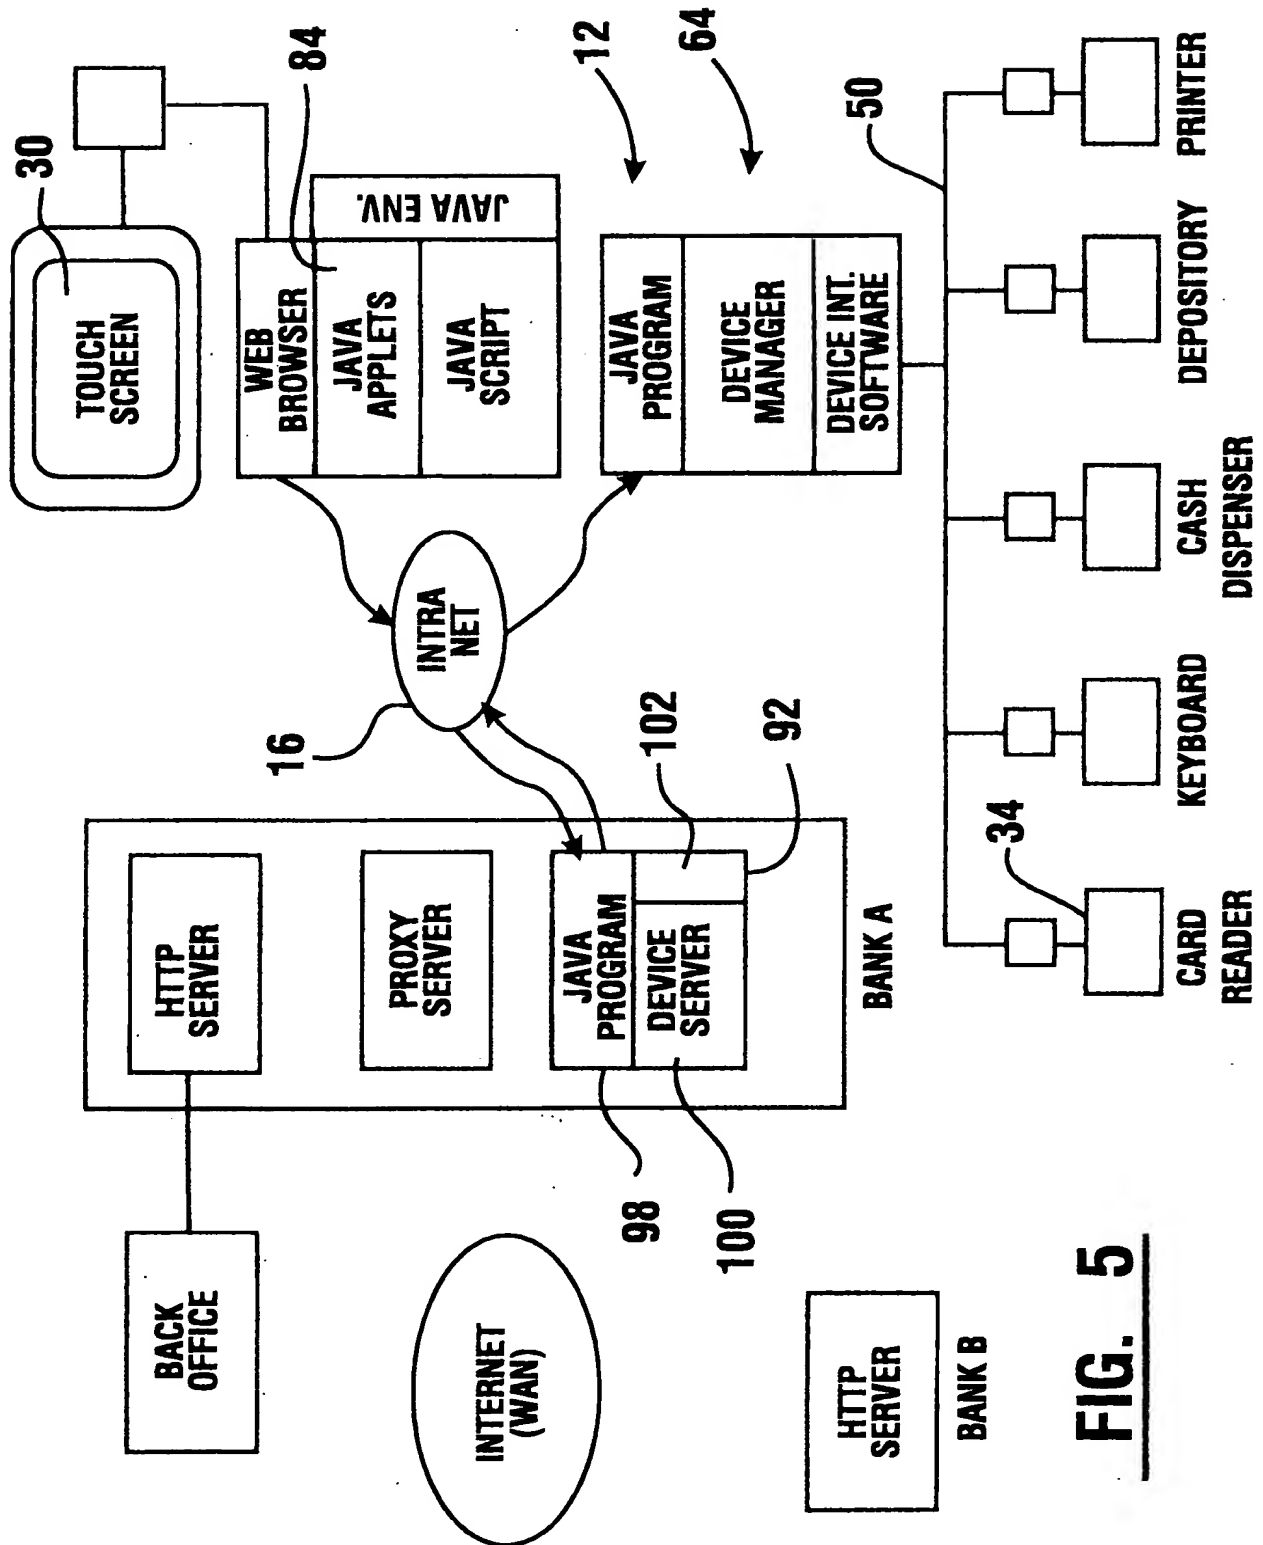


FIG. 5

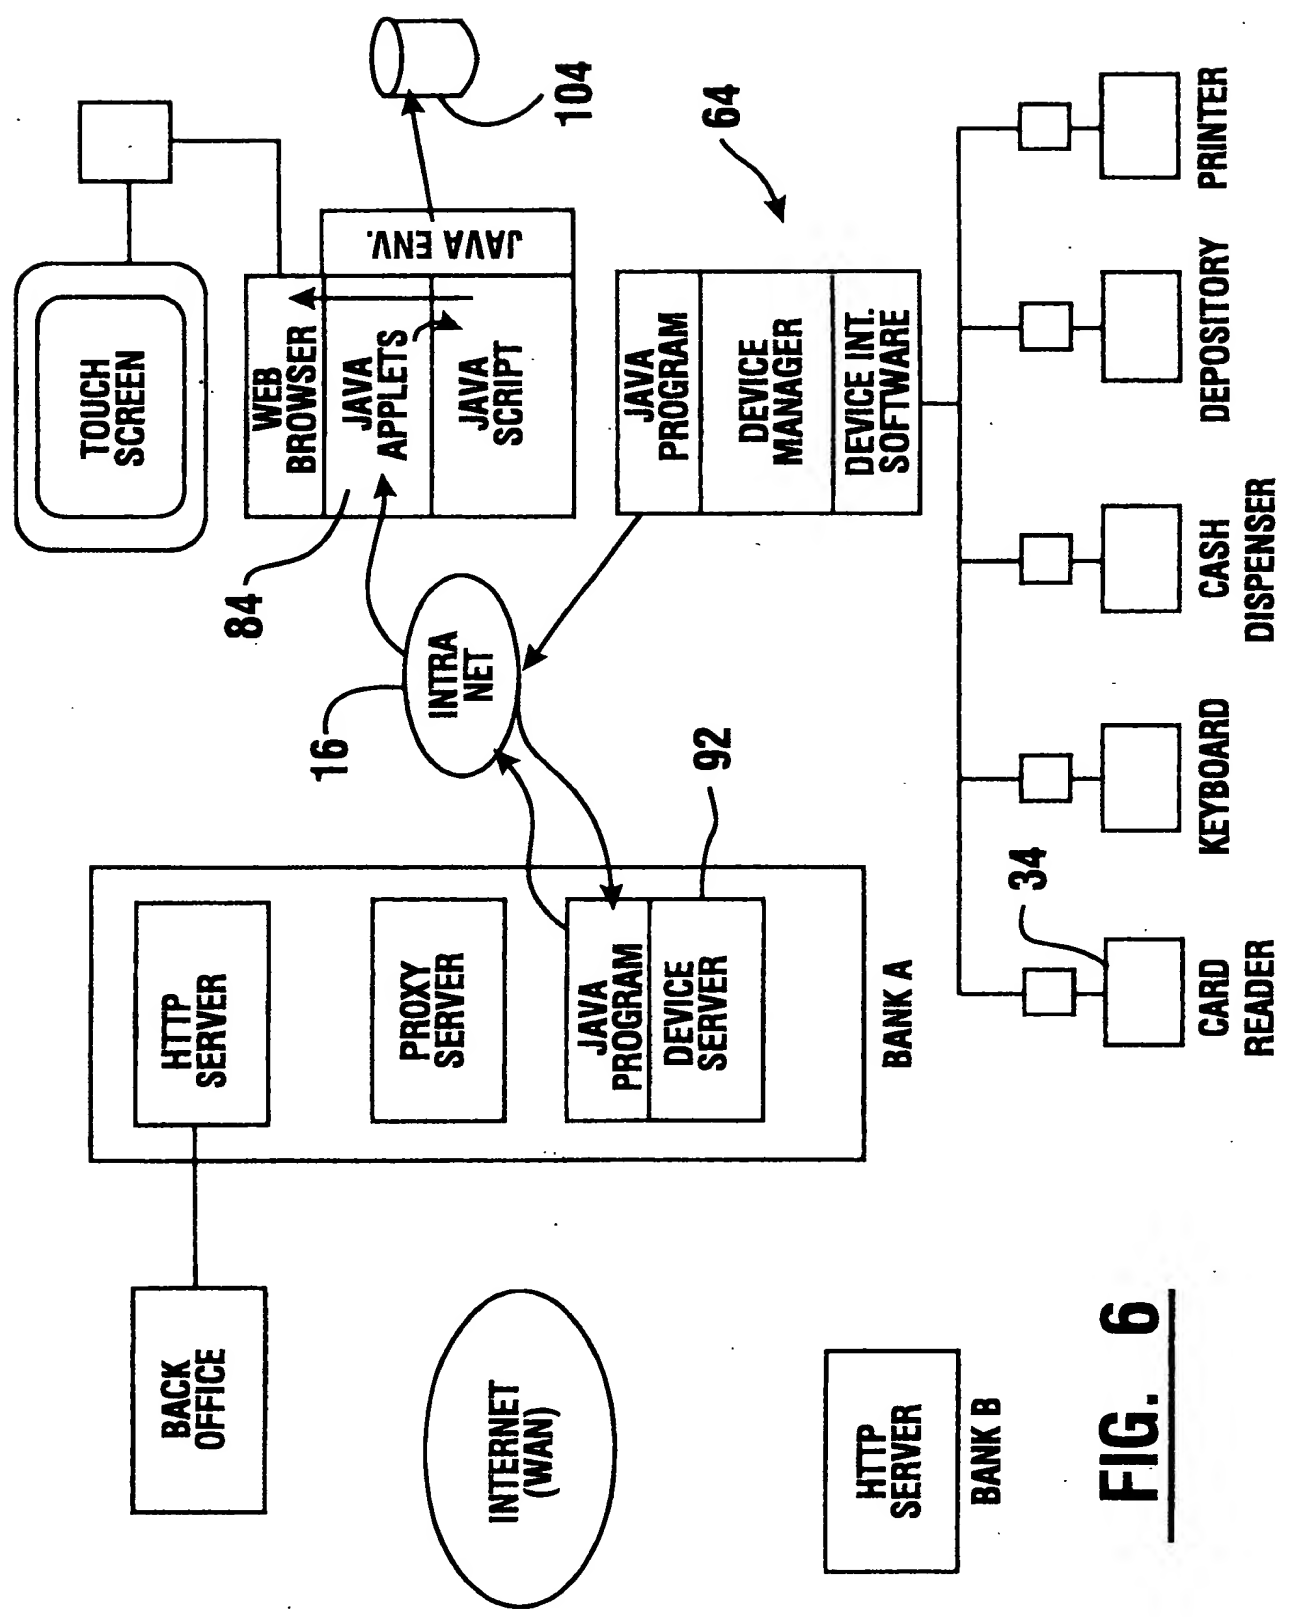


FIG. 6

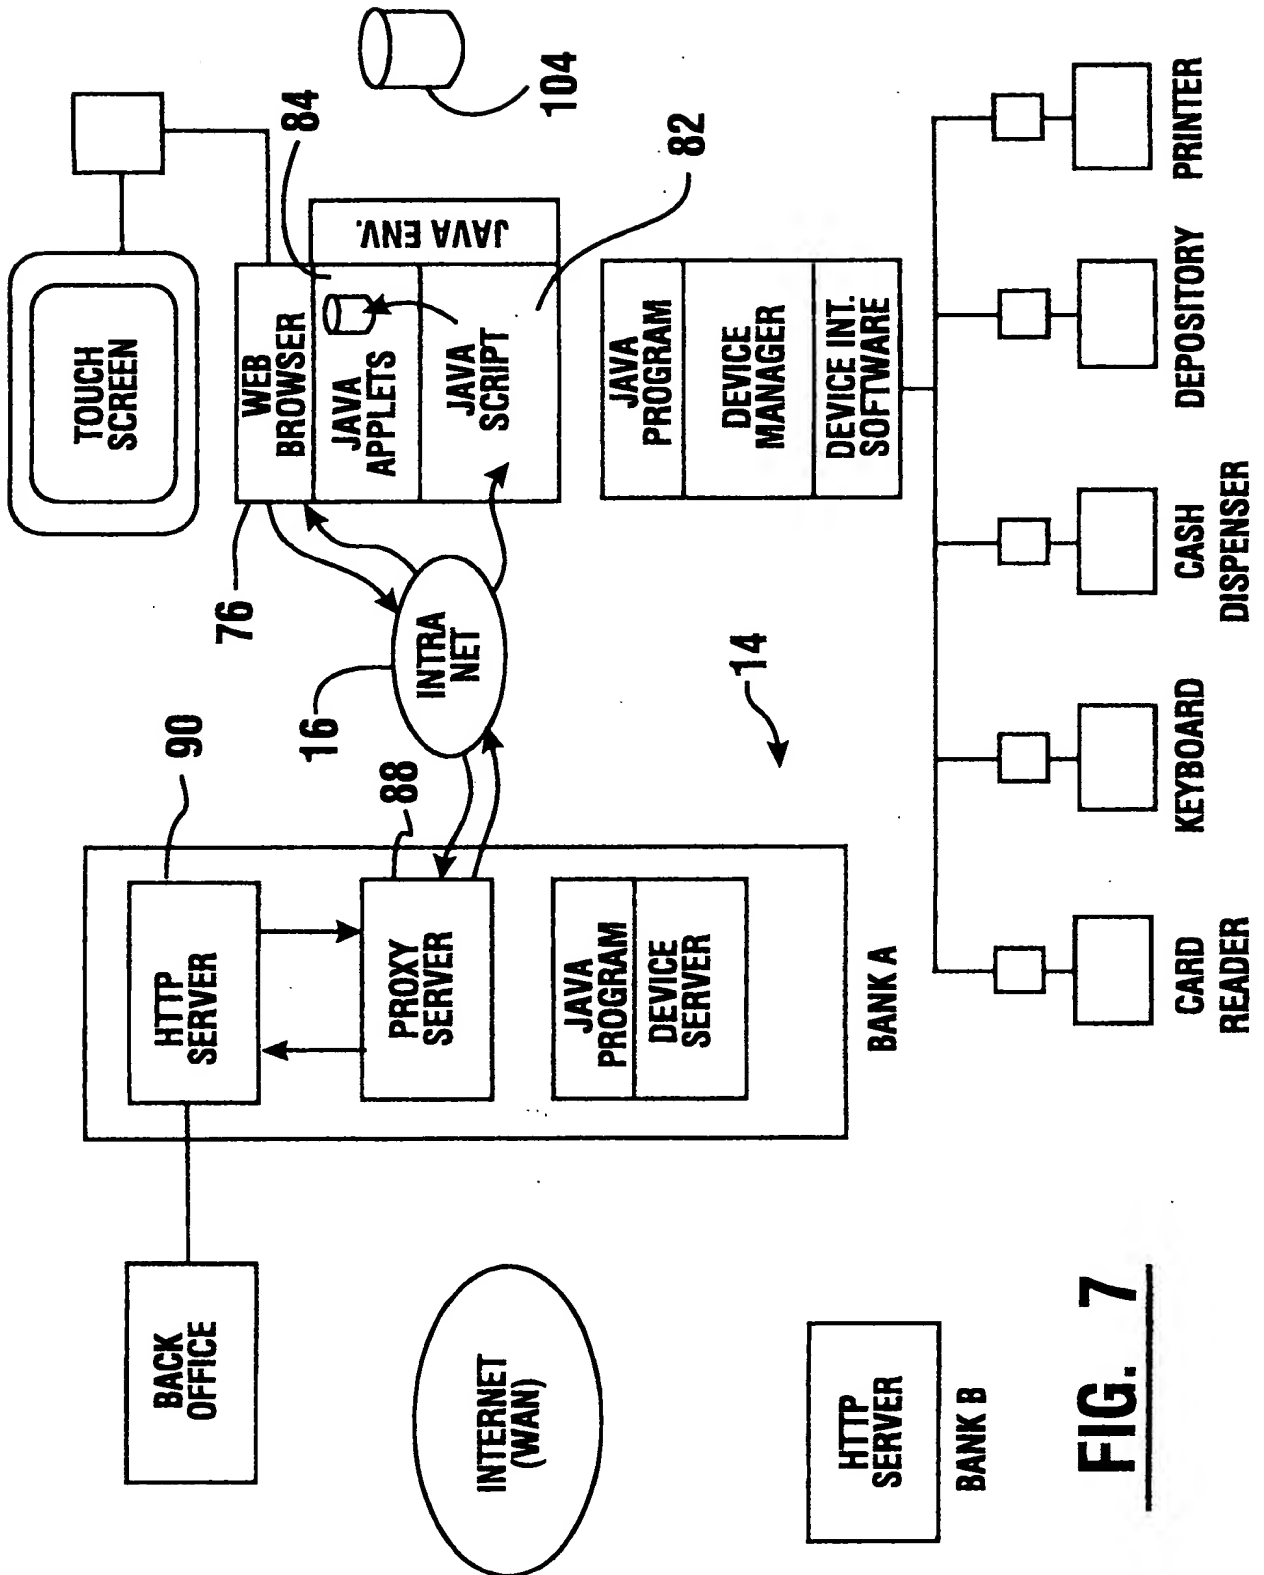


FIG. 7

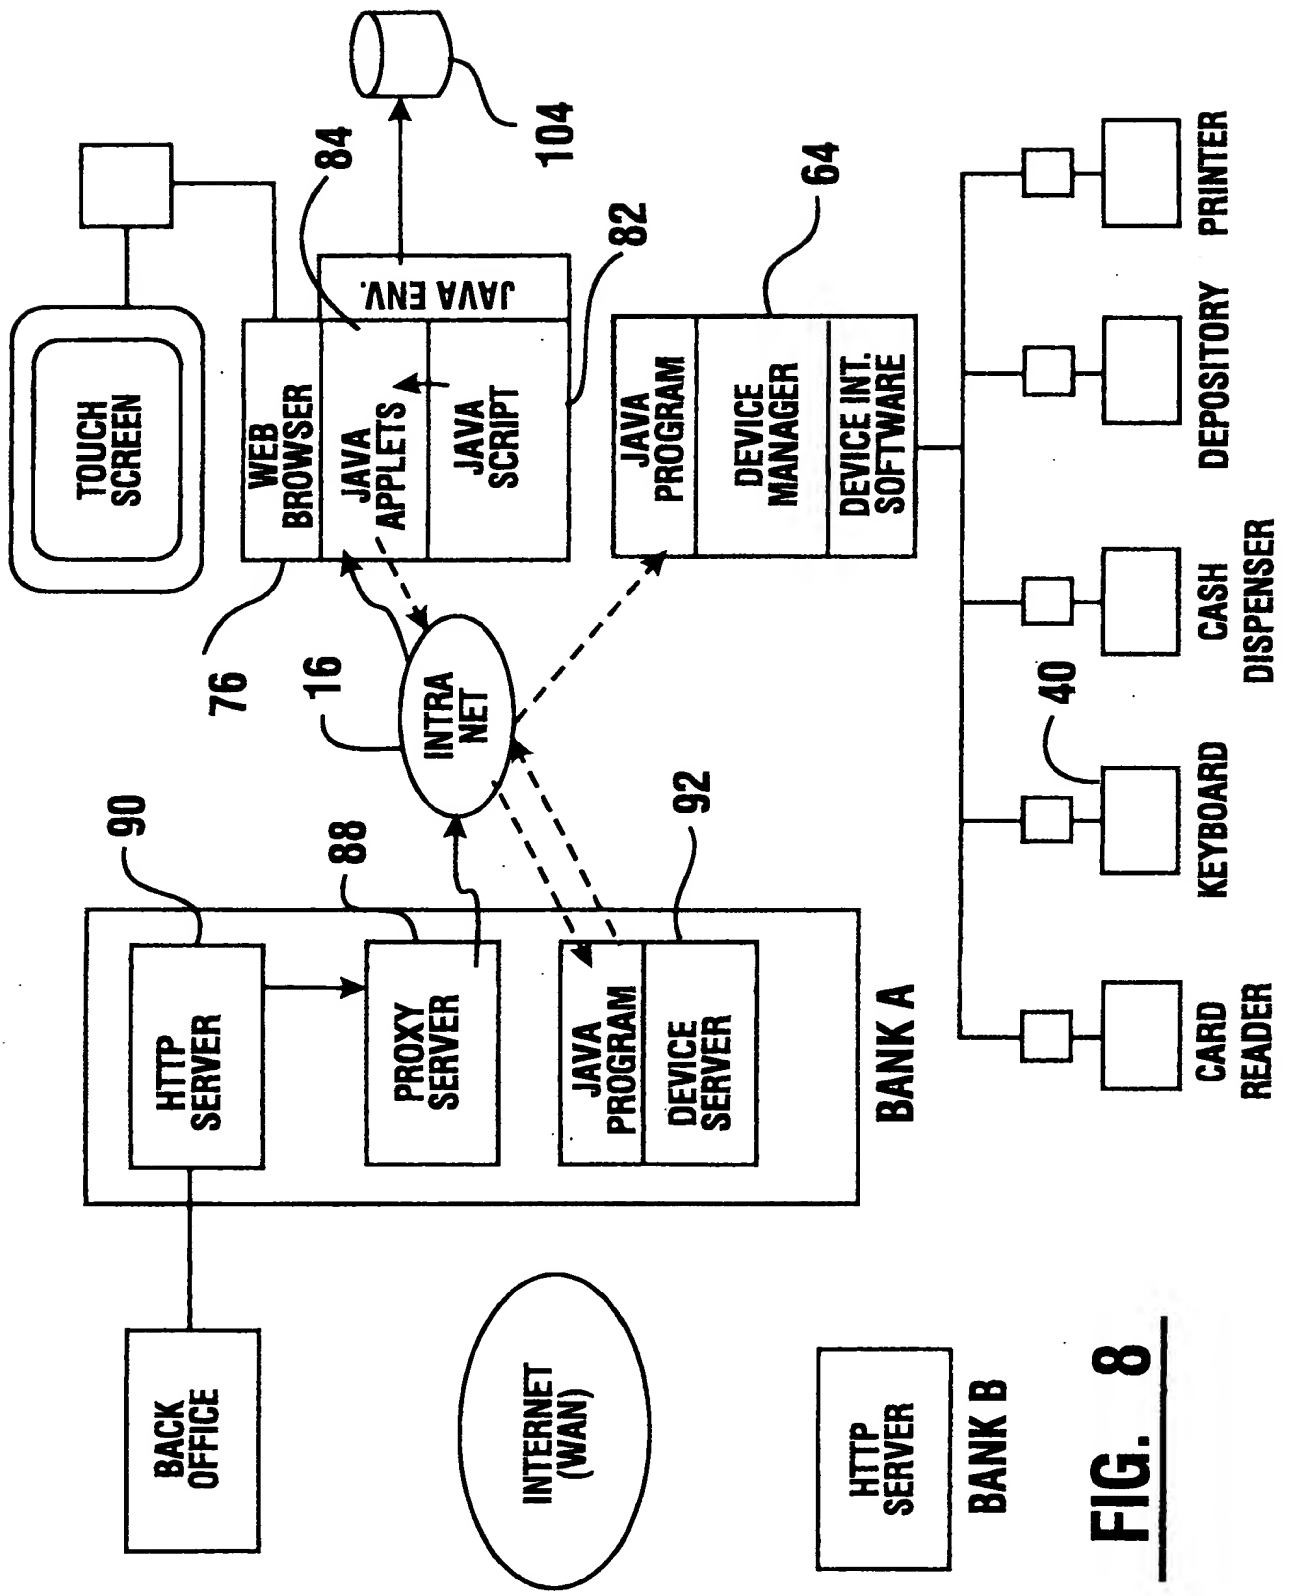


FIG. 8

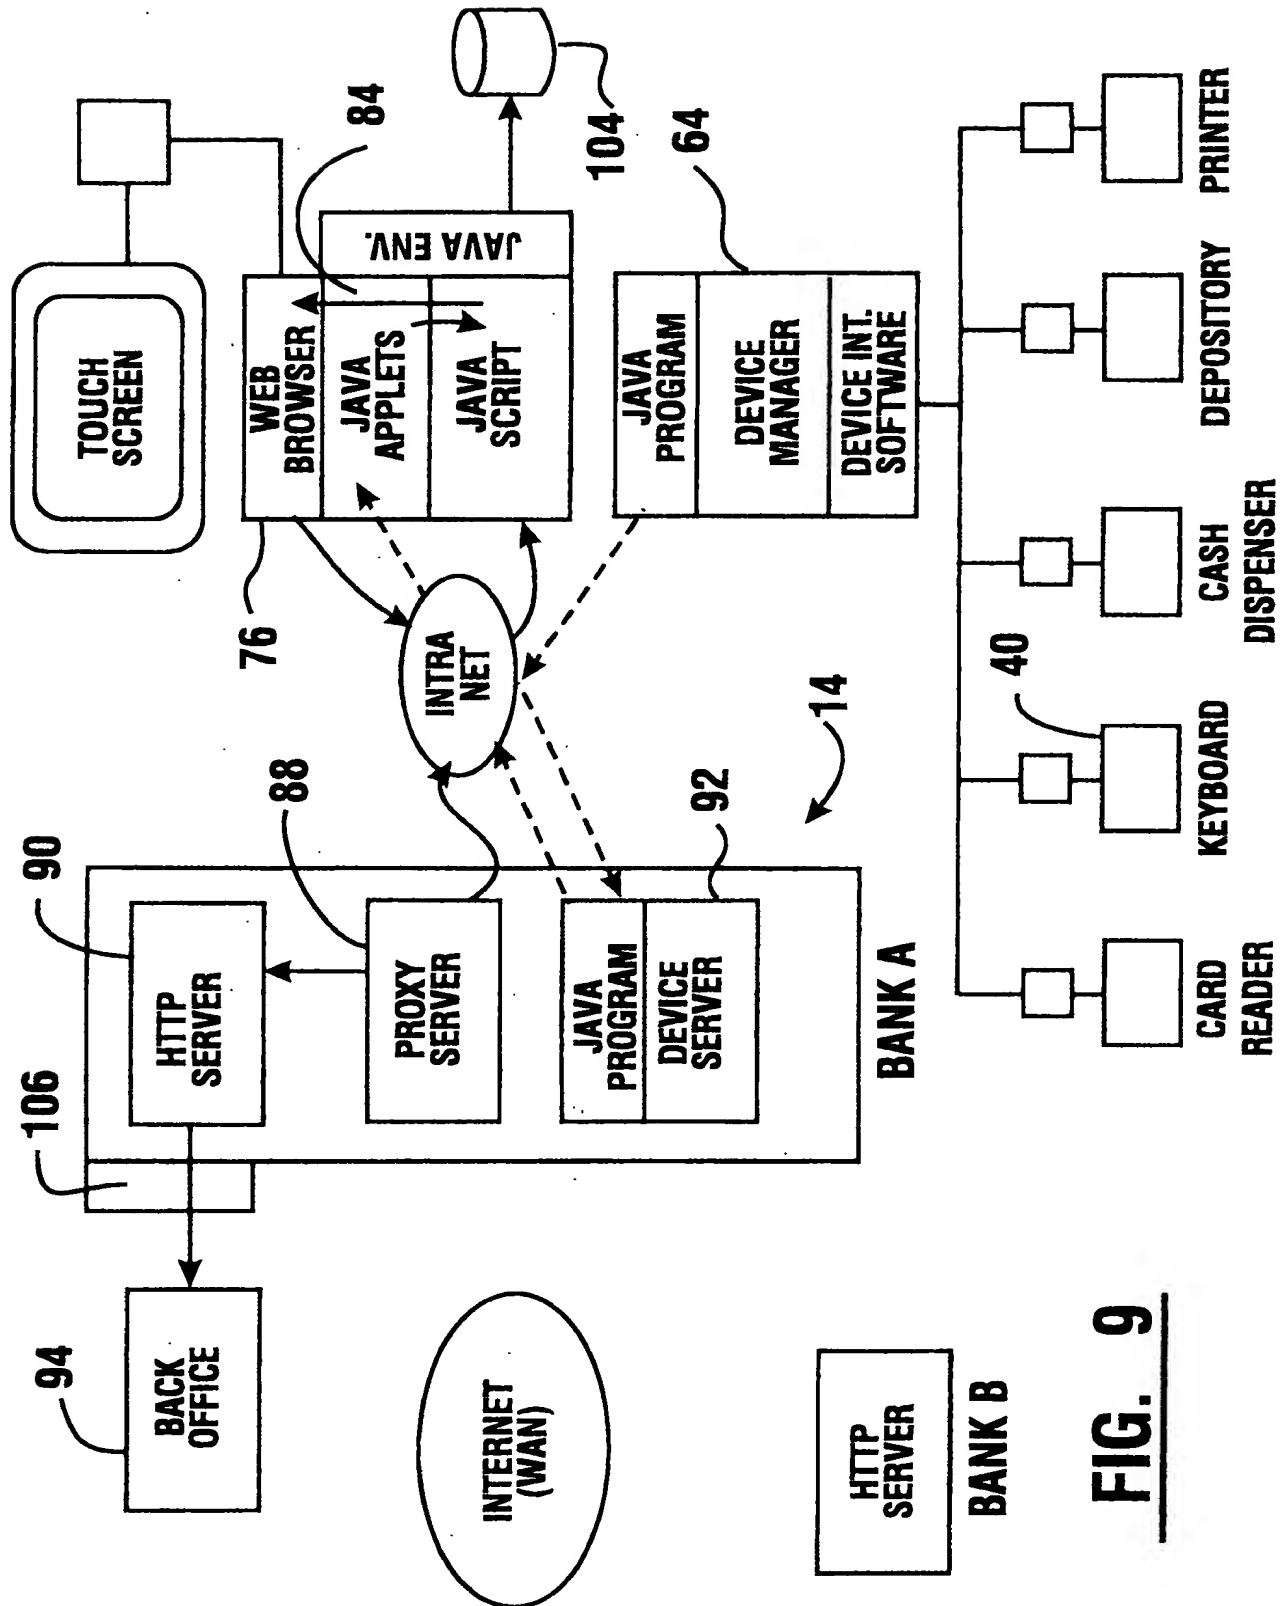


FIG. 9

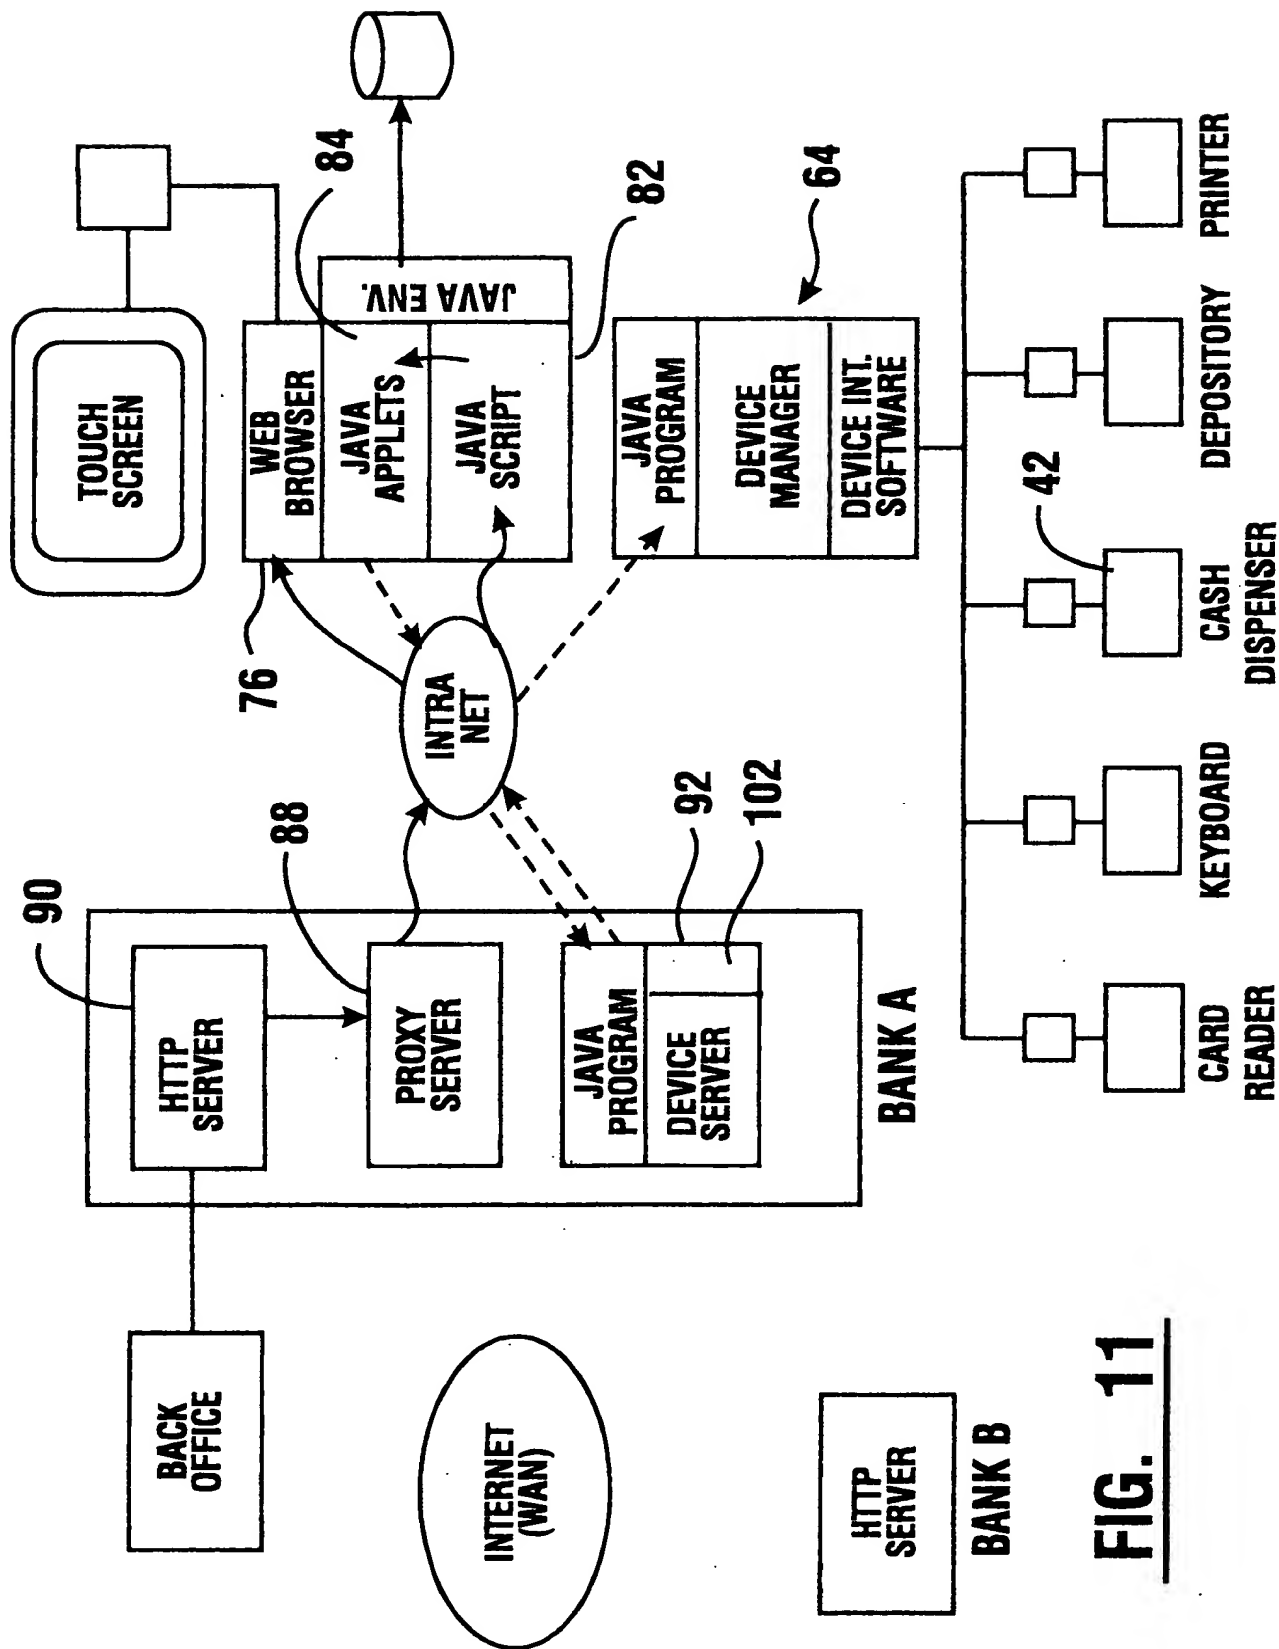
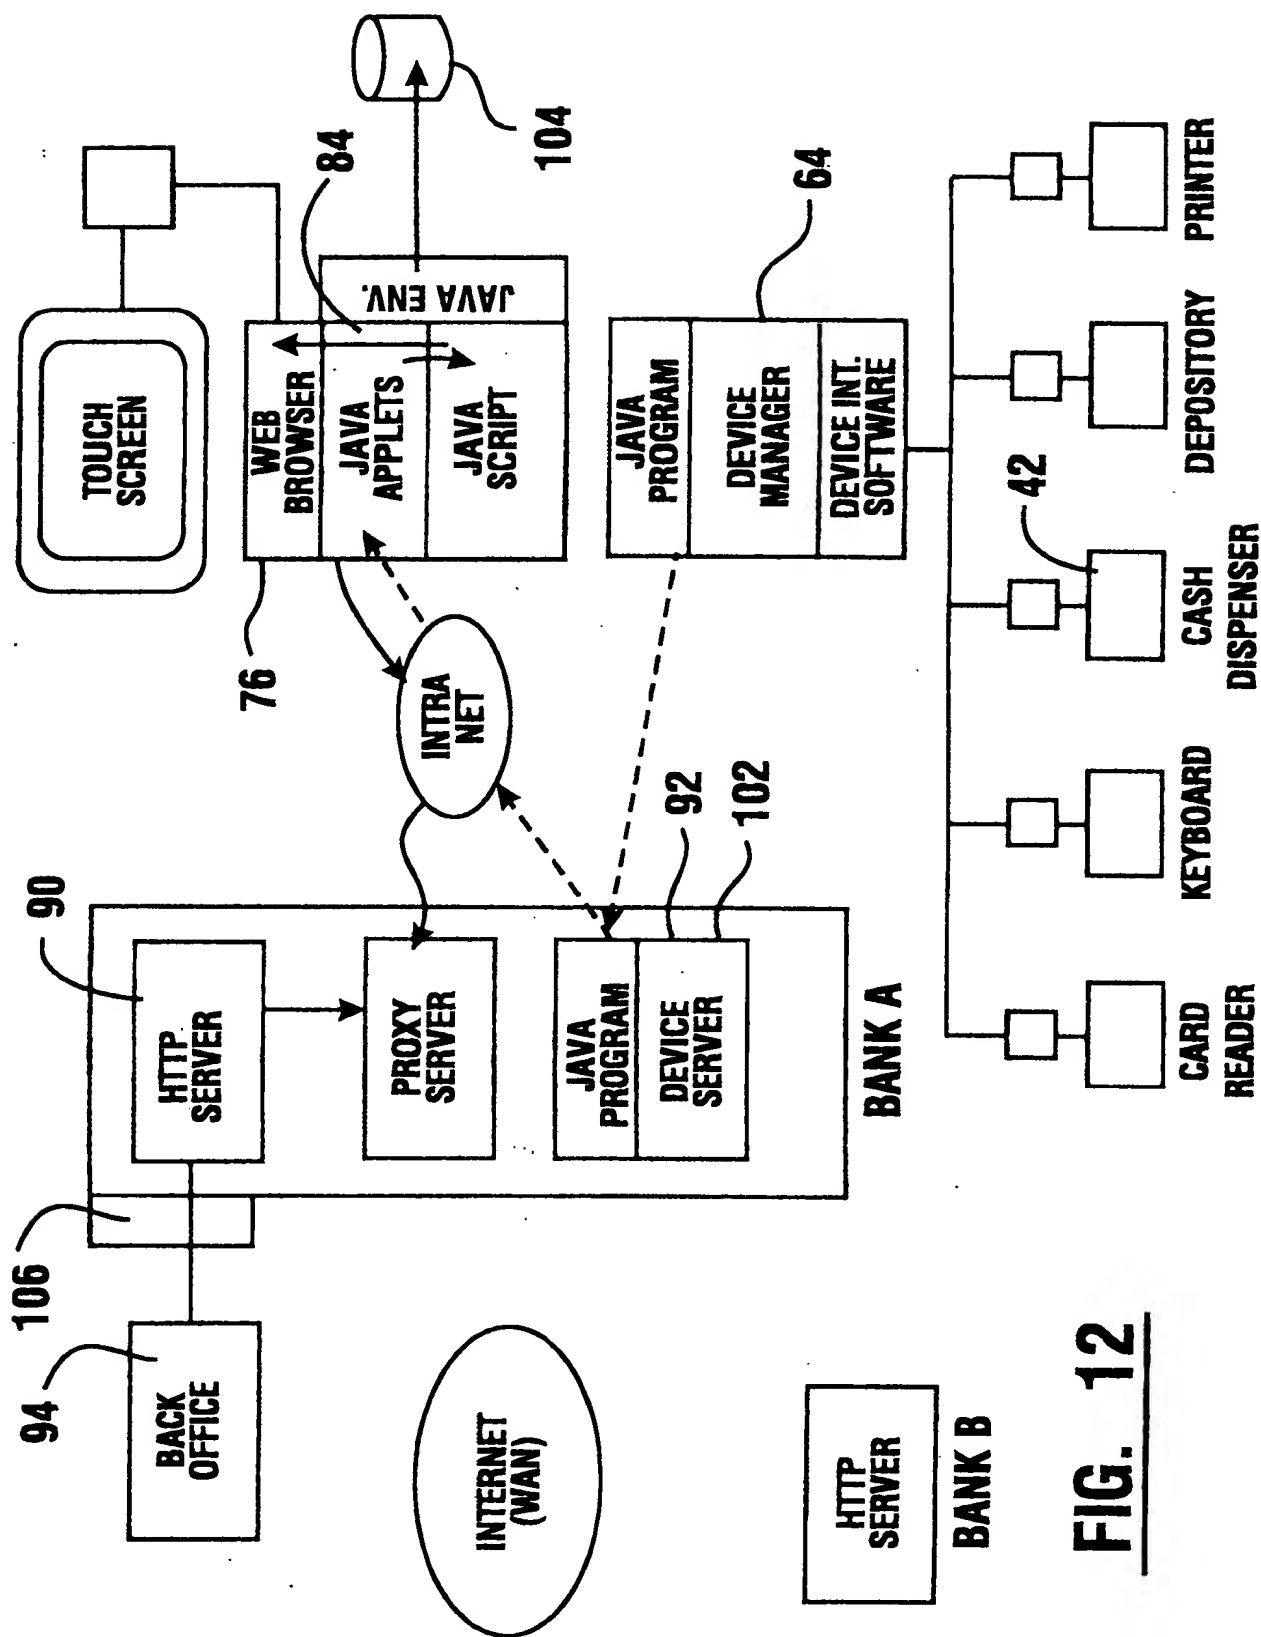
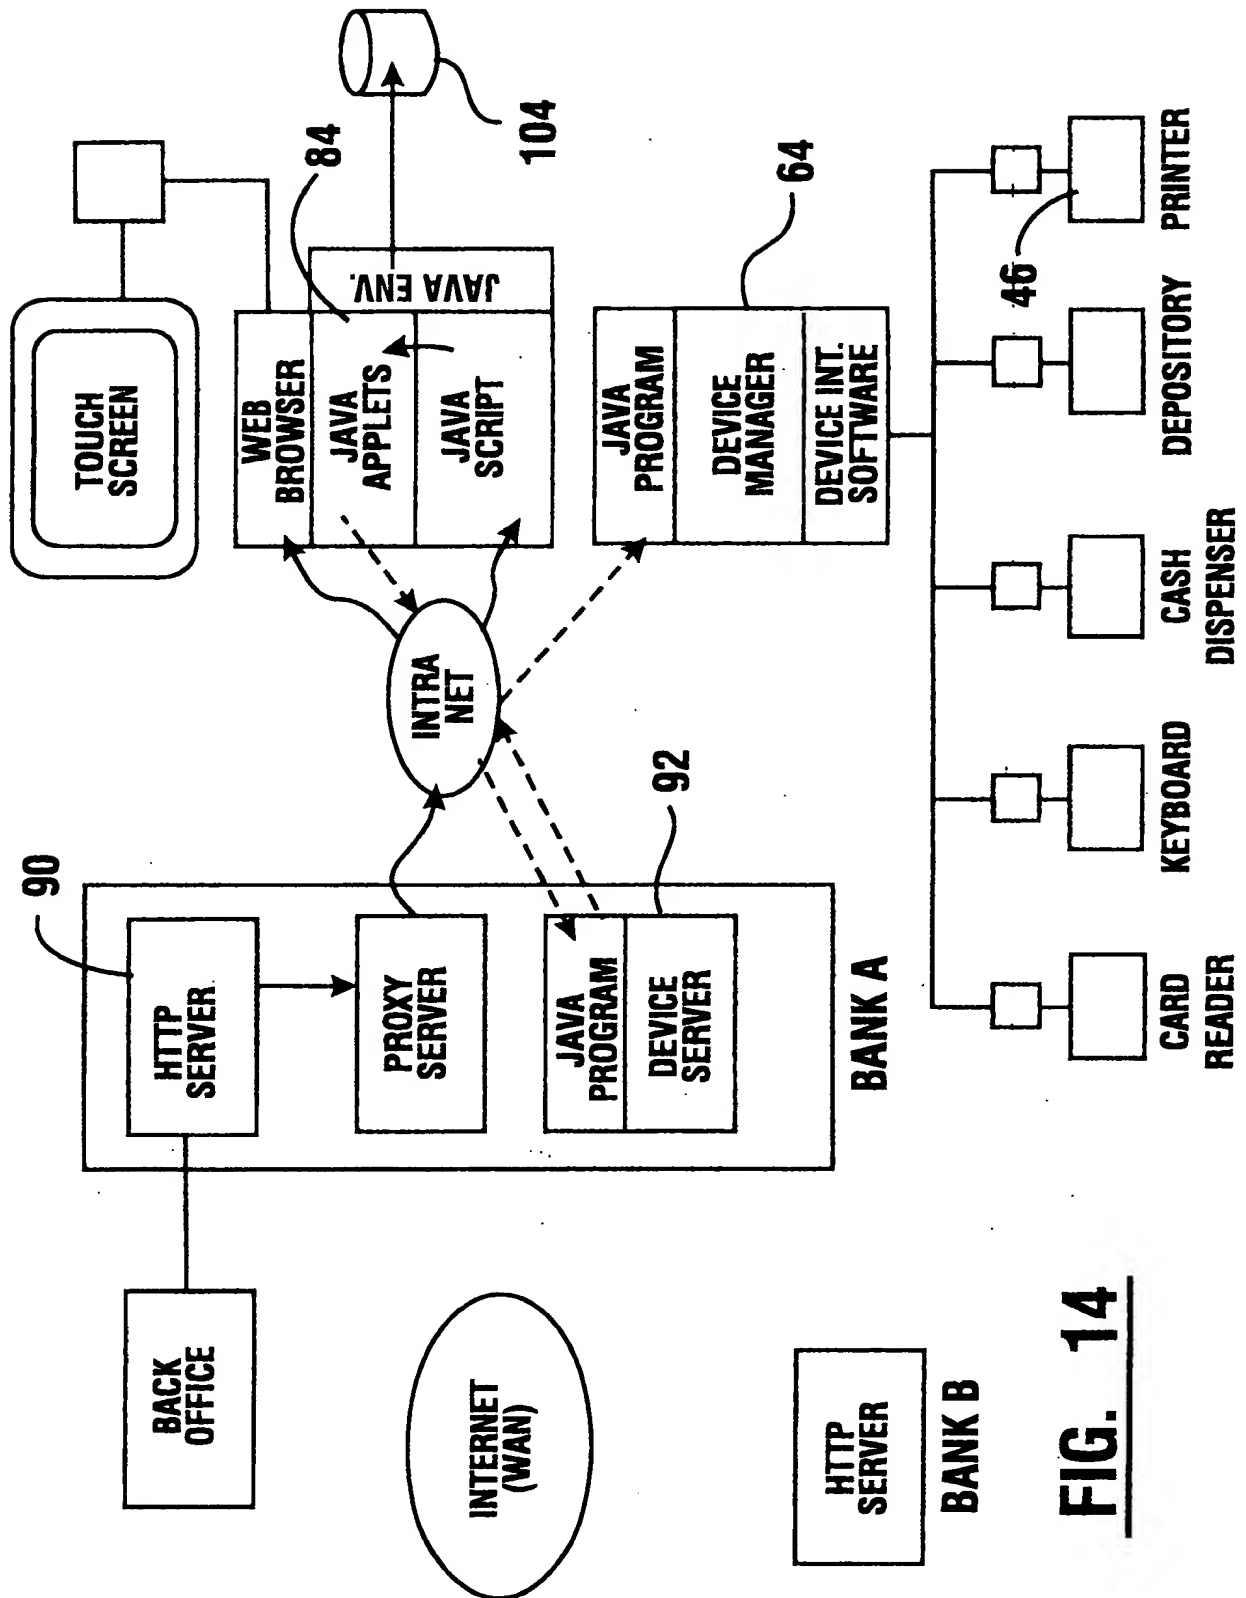


FIG. 11





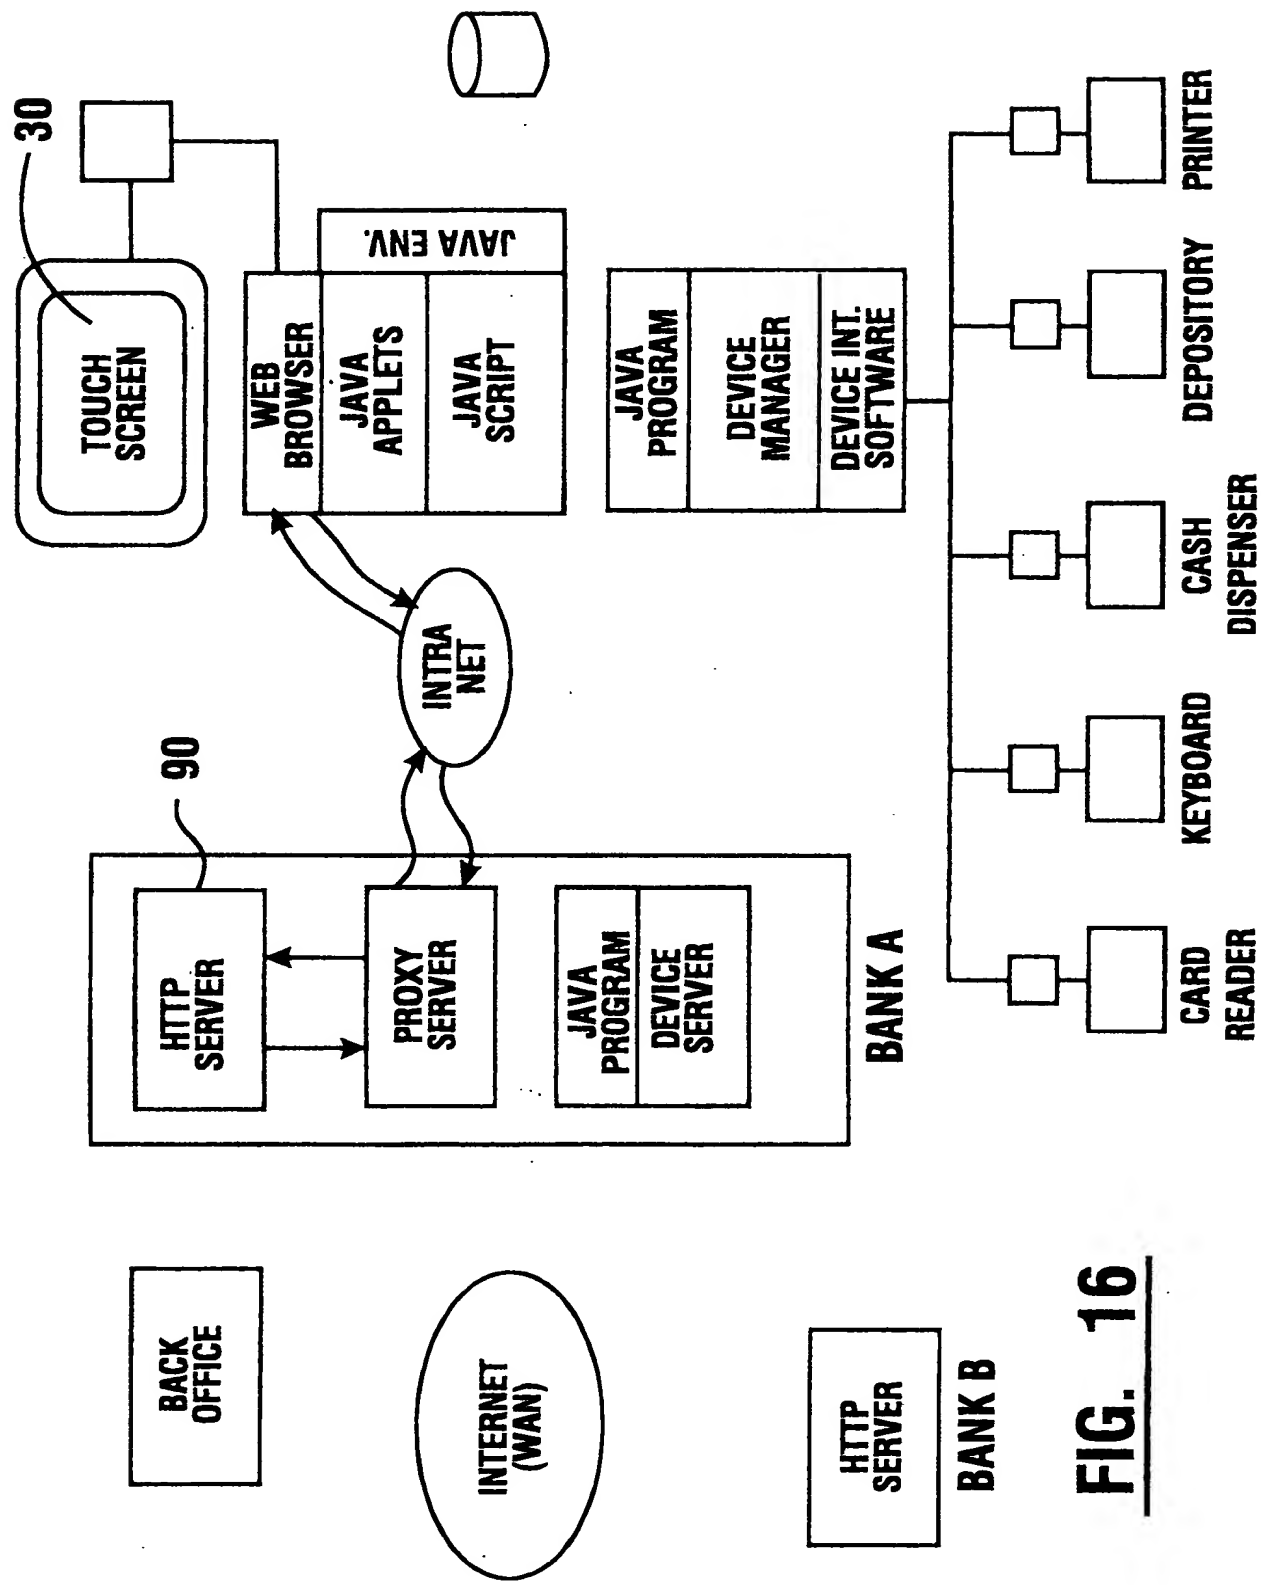


FIG. 16

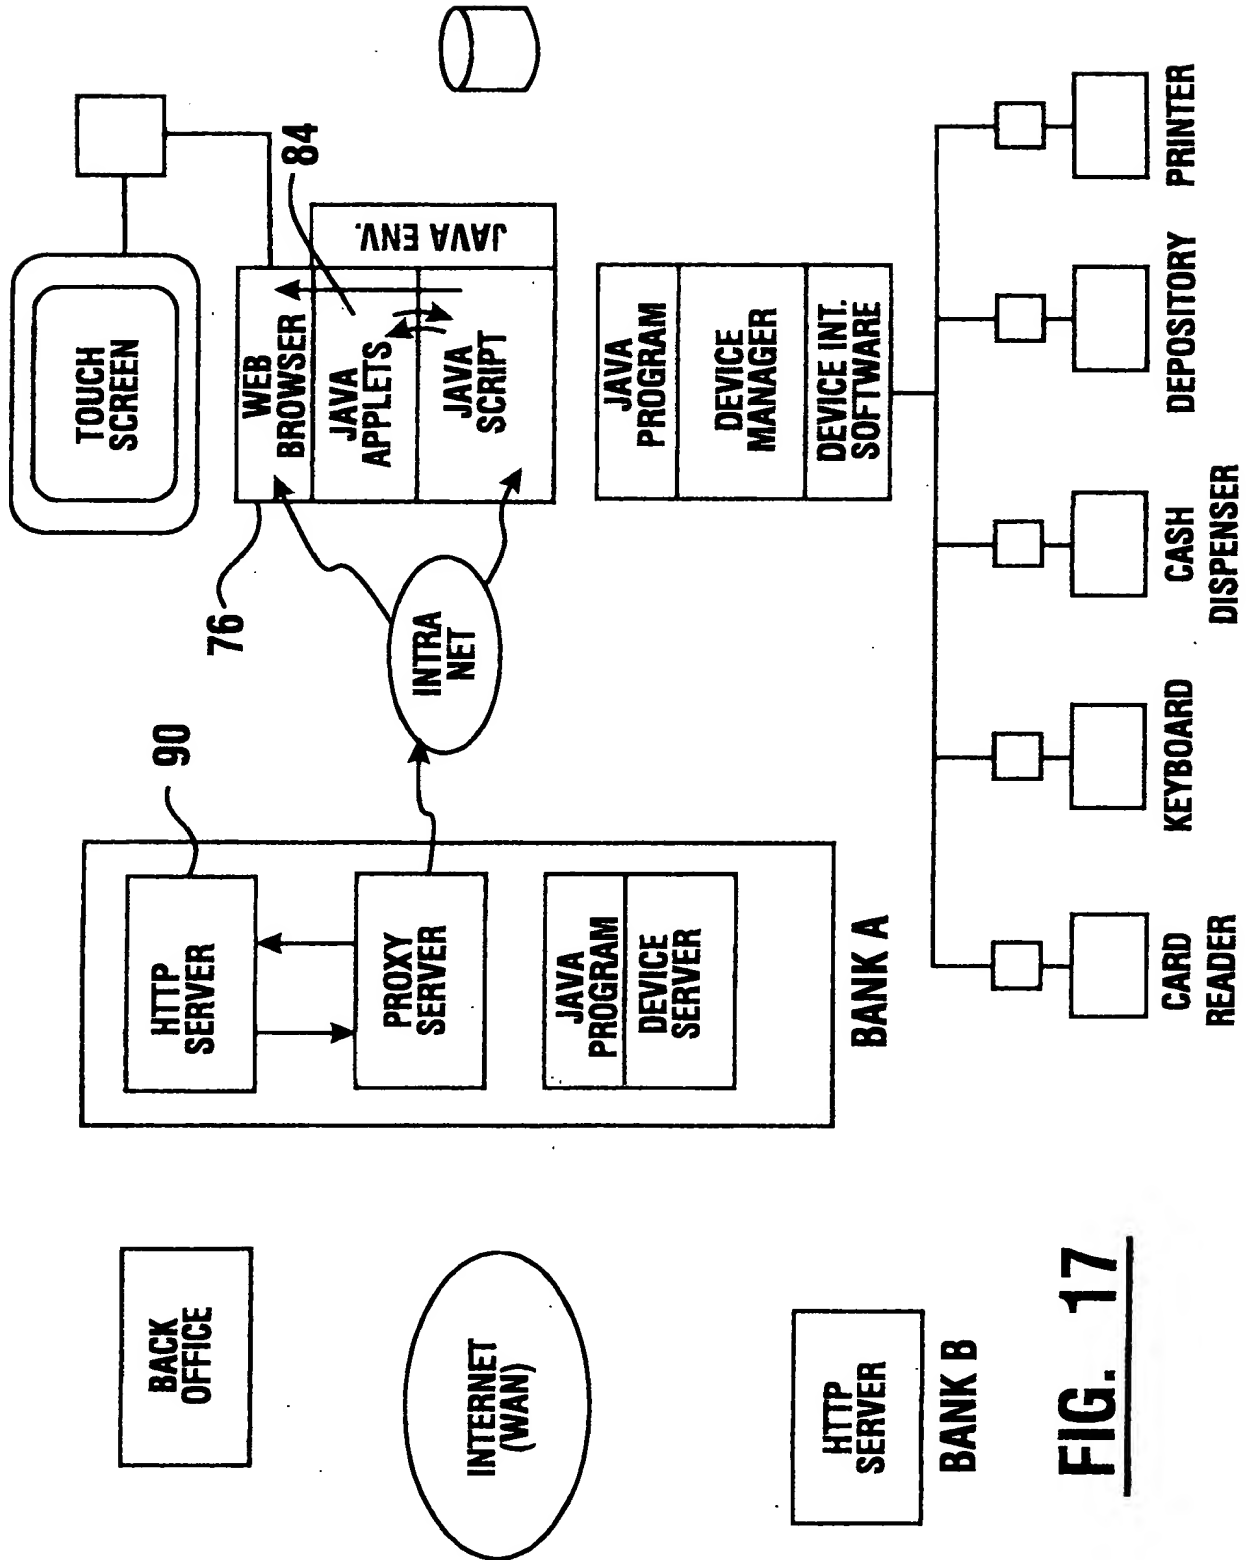


FIG. 17

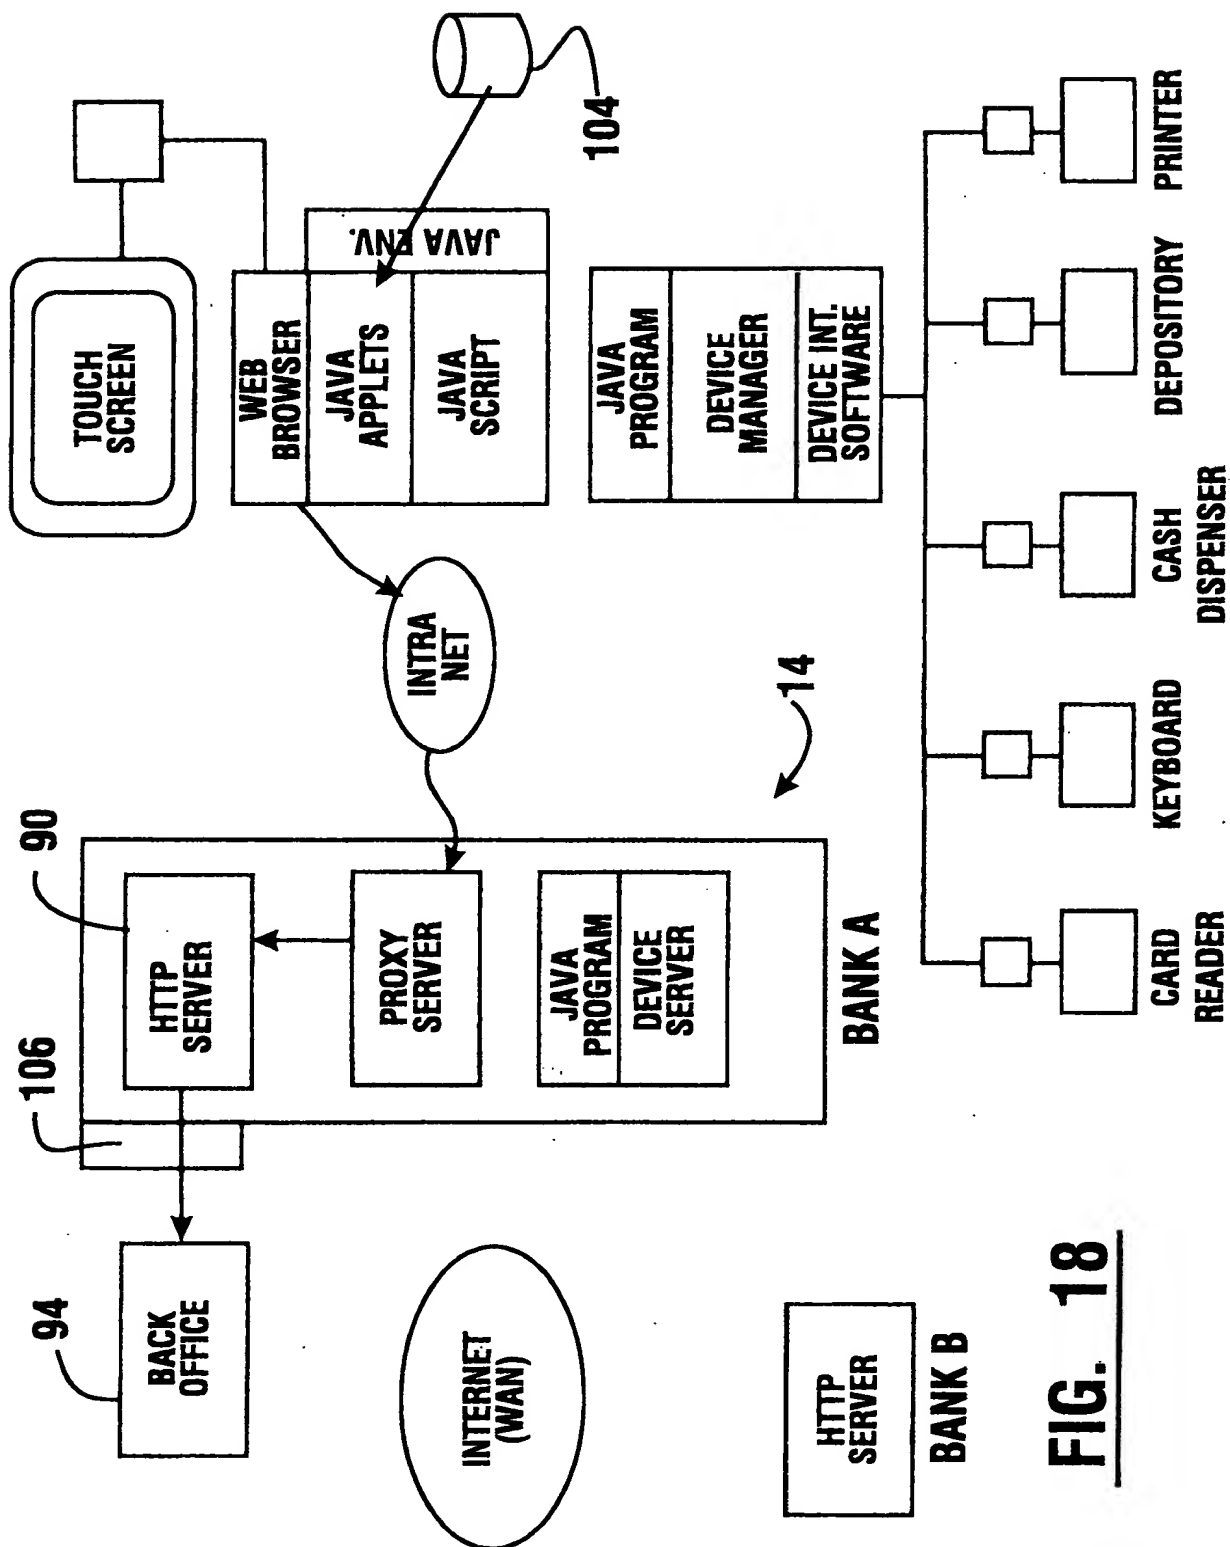


FIG. 18

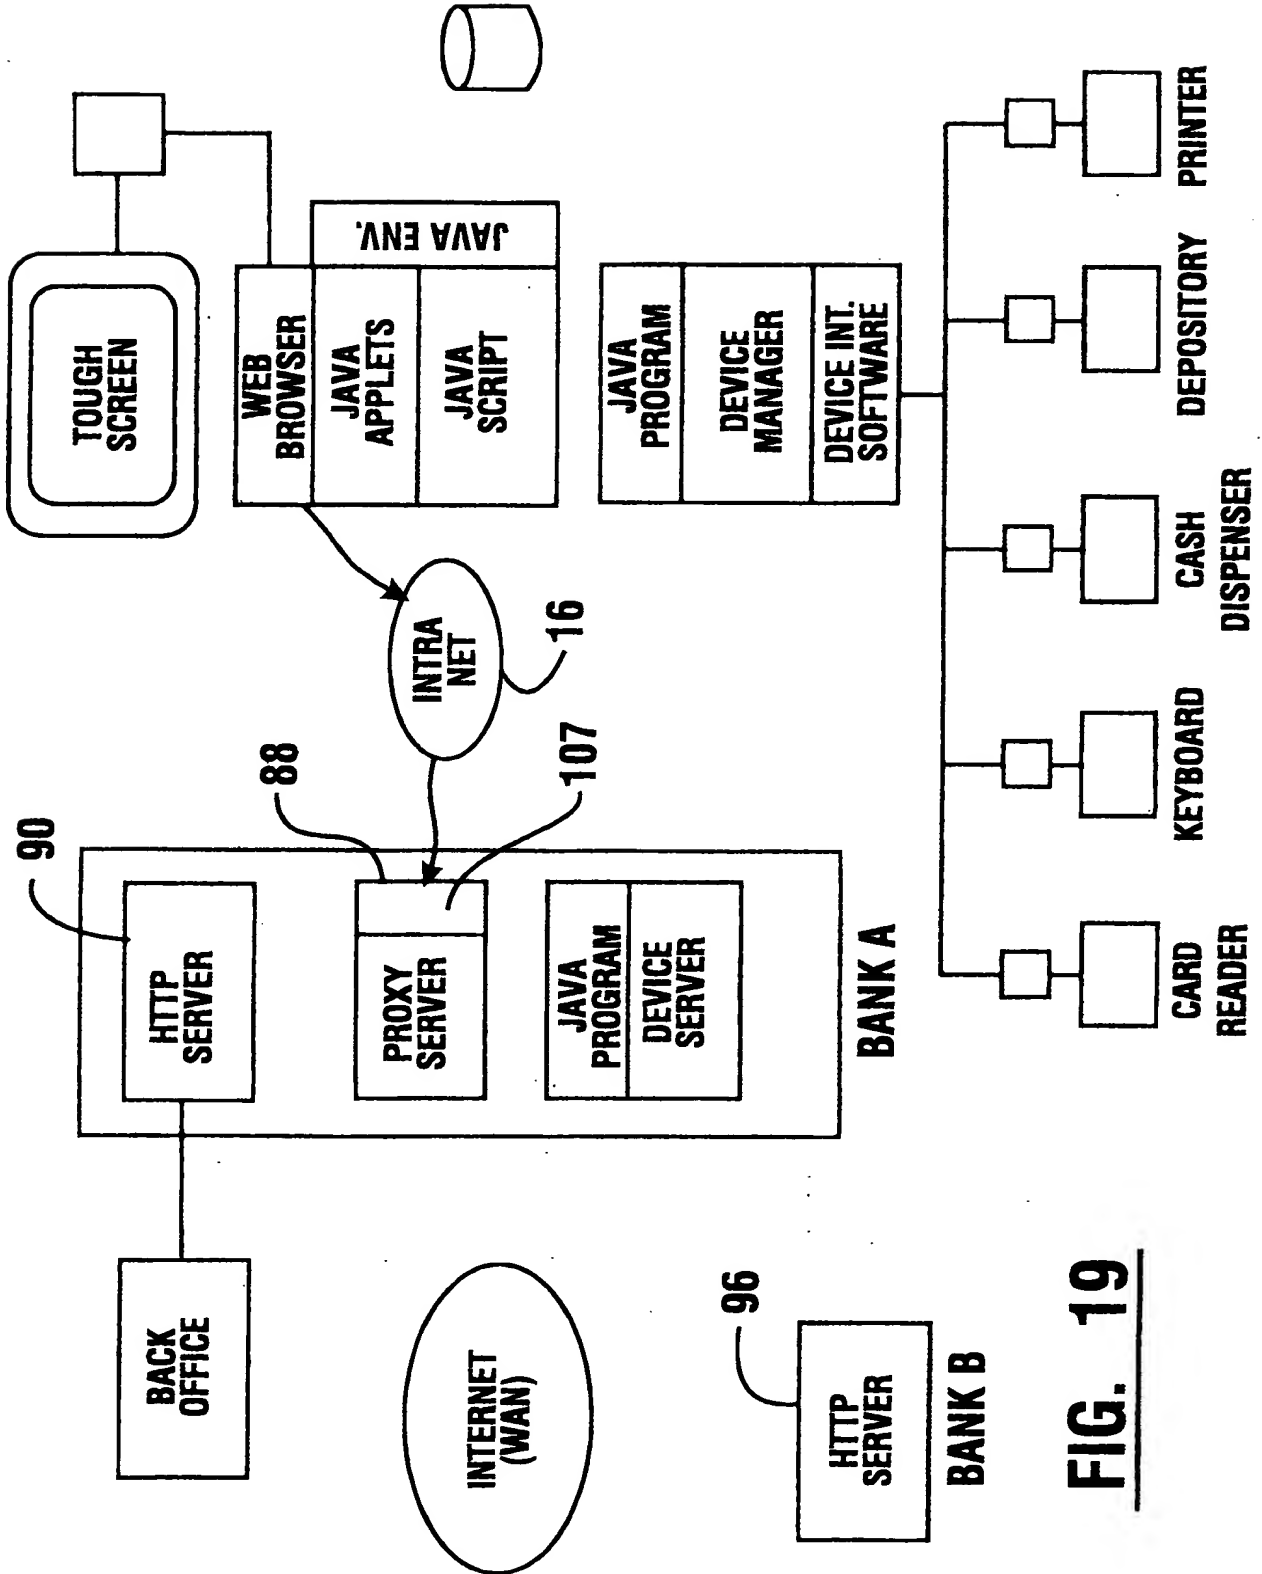
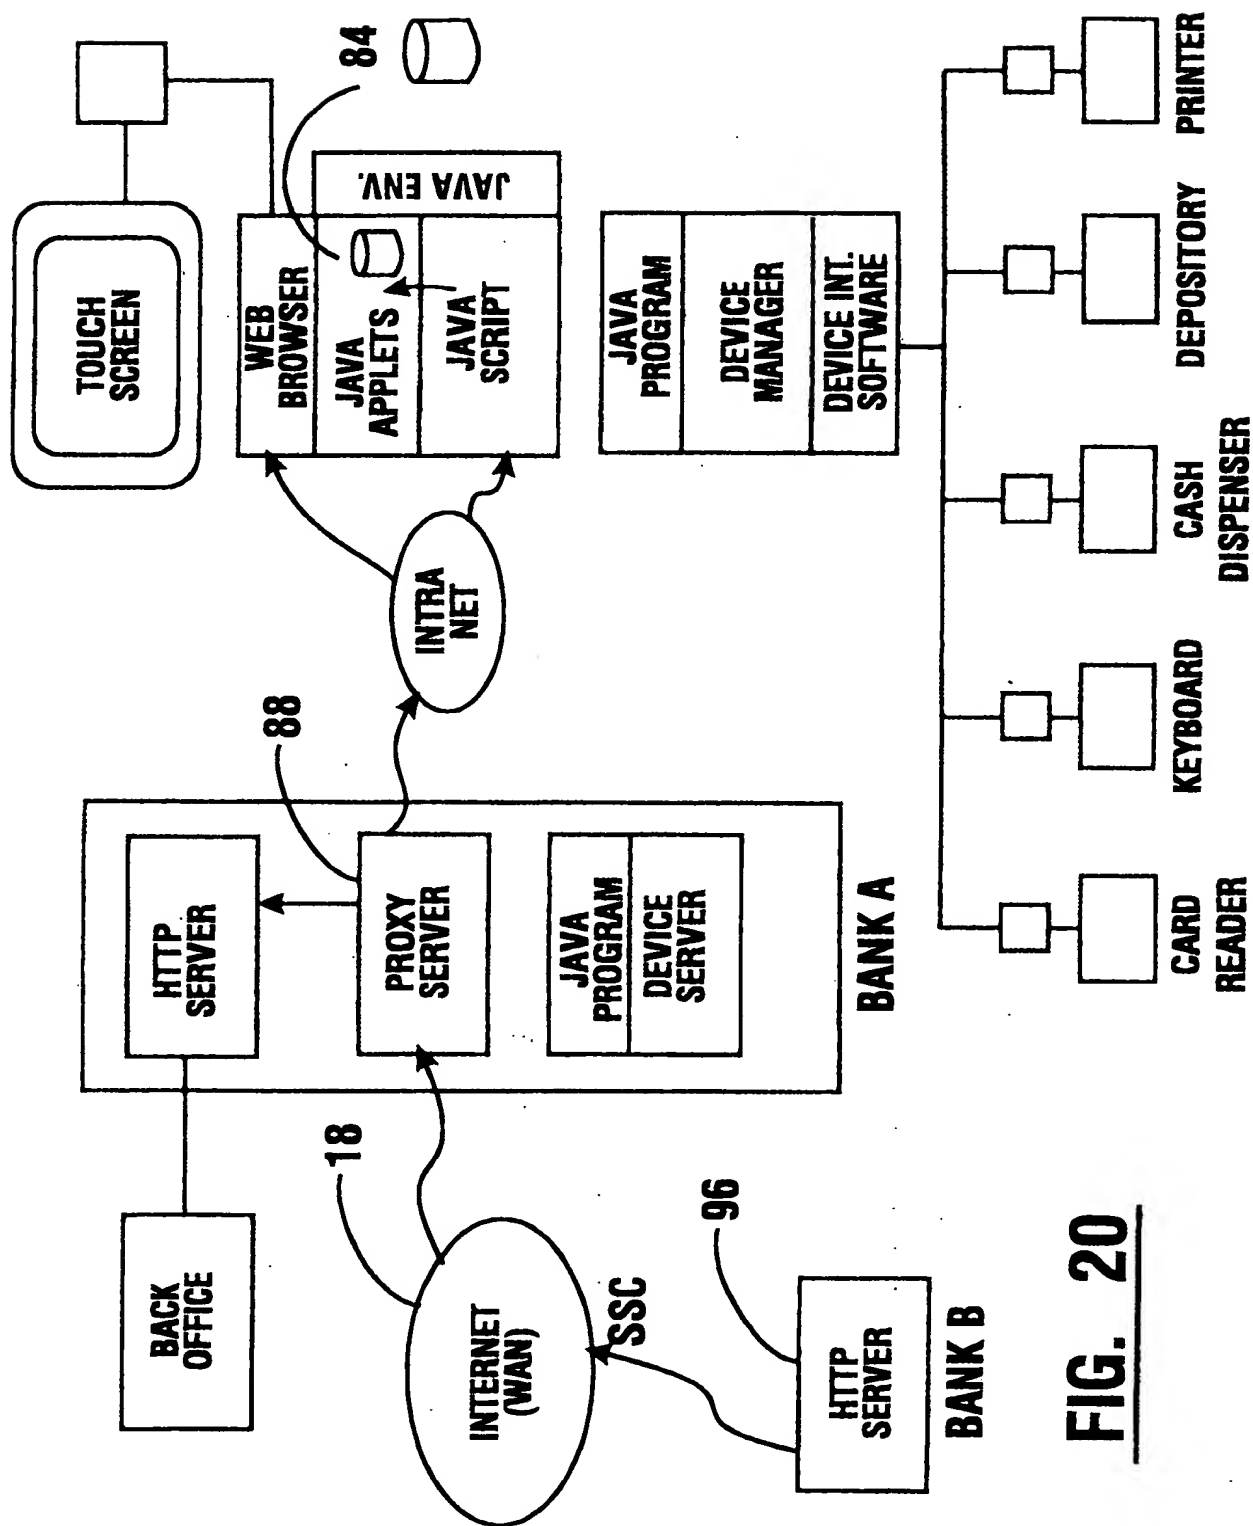
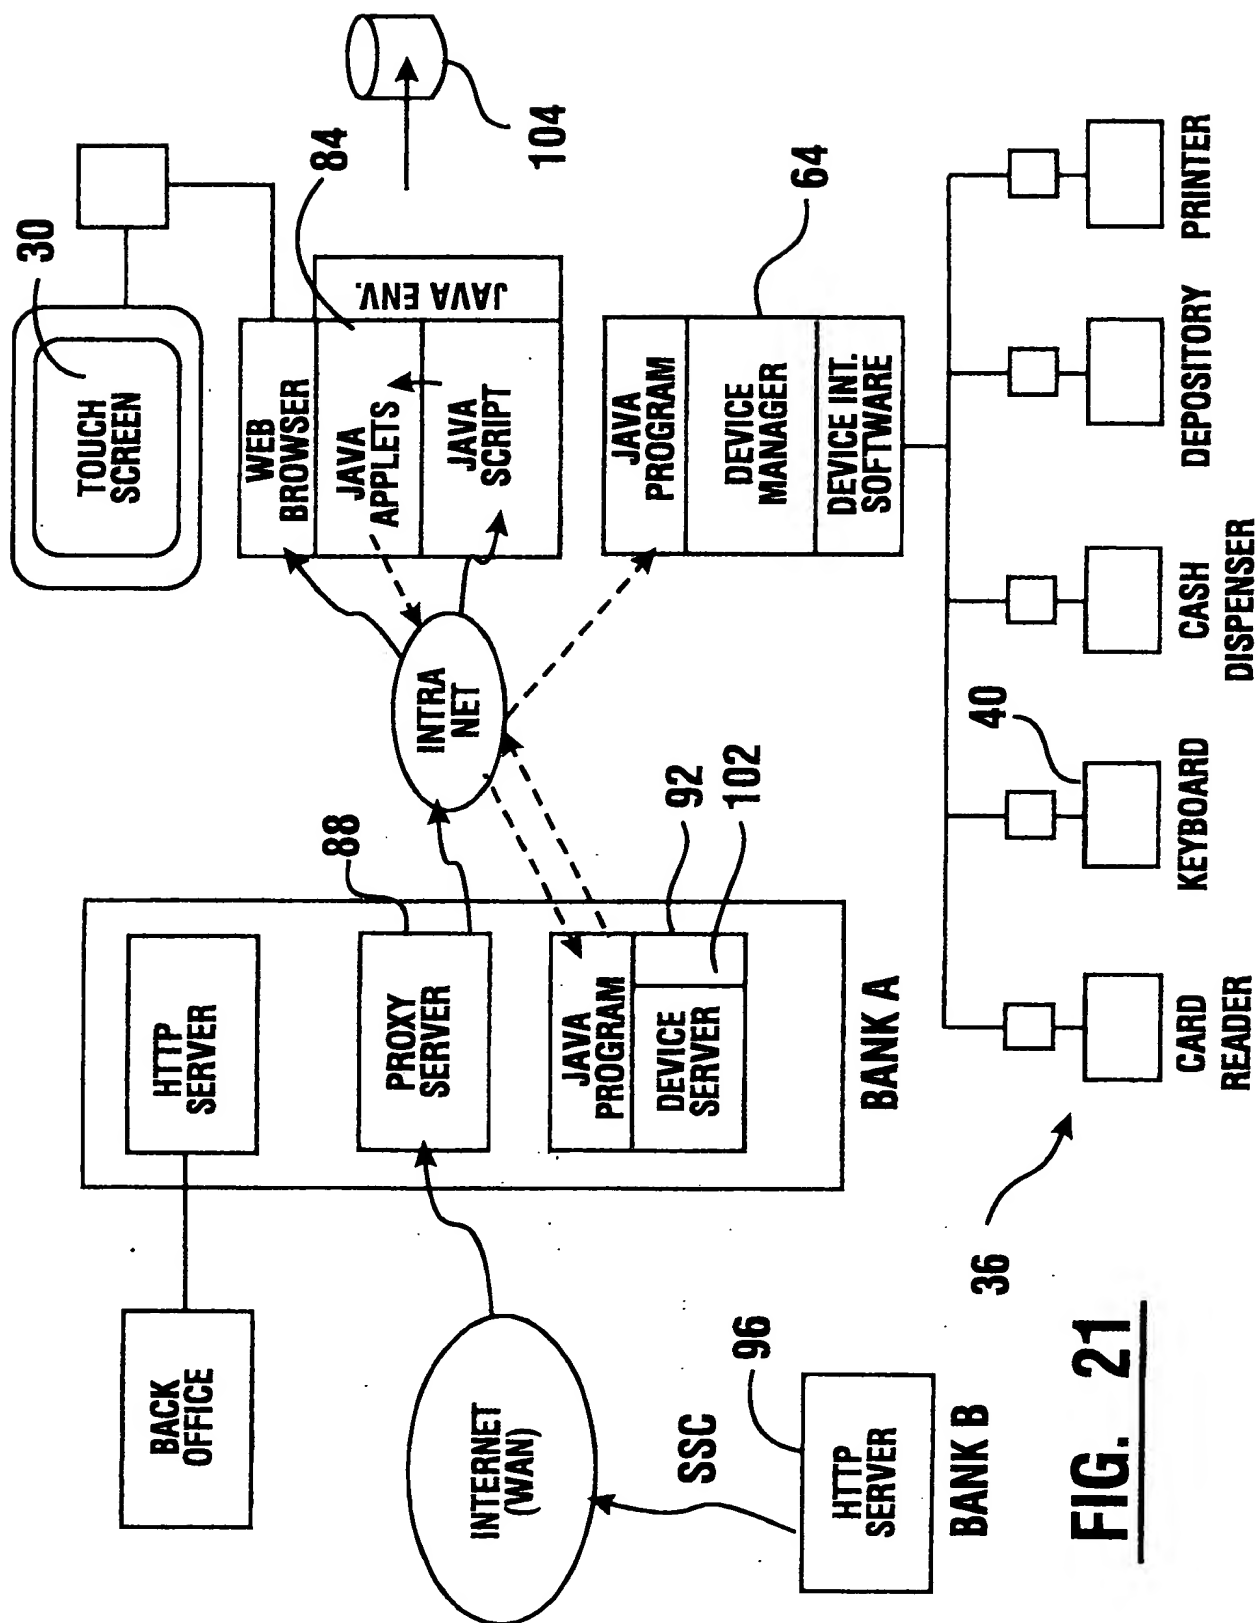


FIG. 19





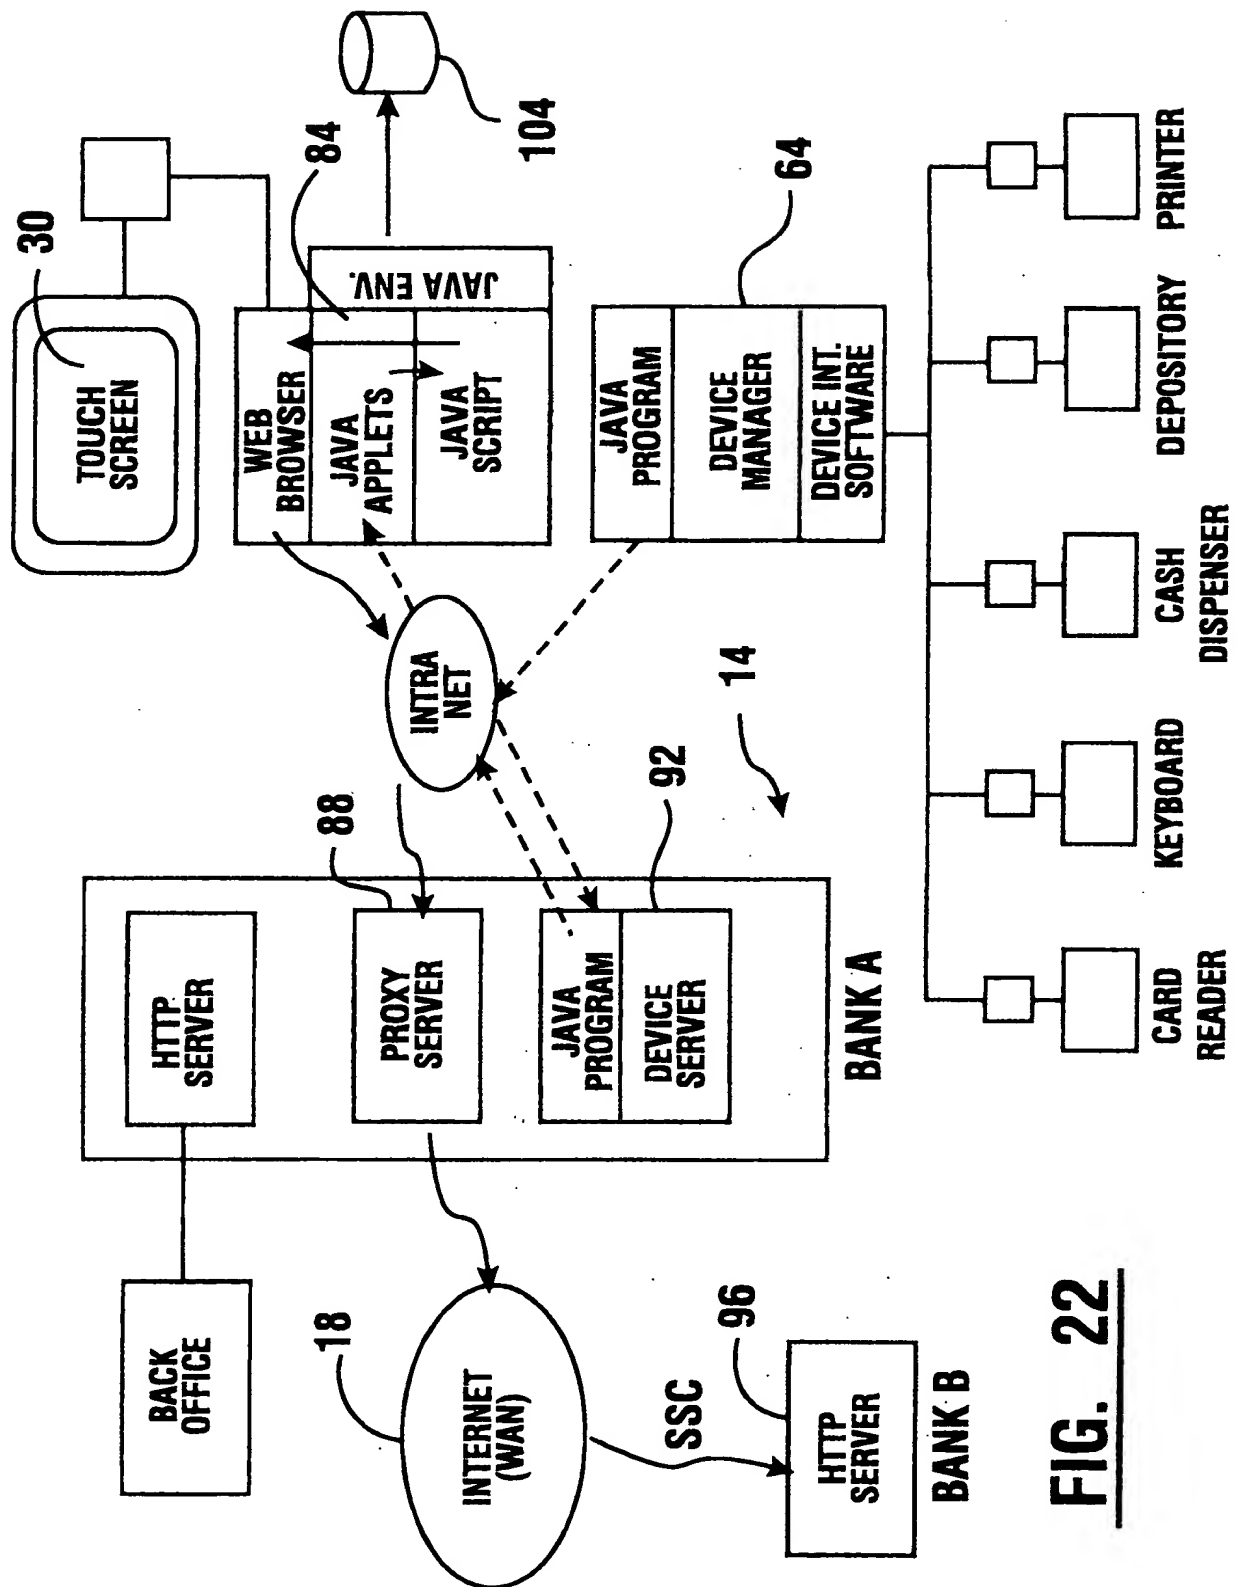


FIG. 22

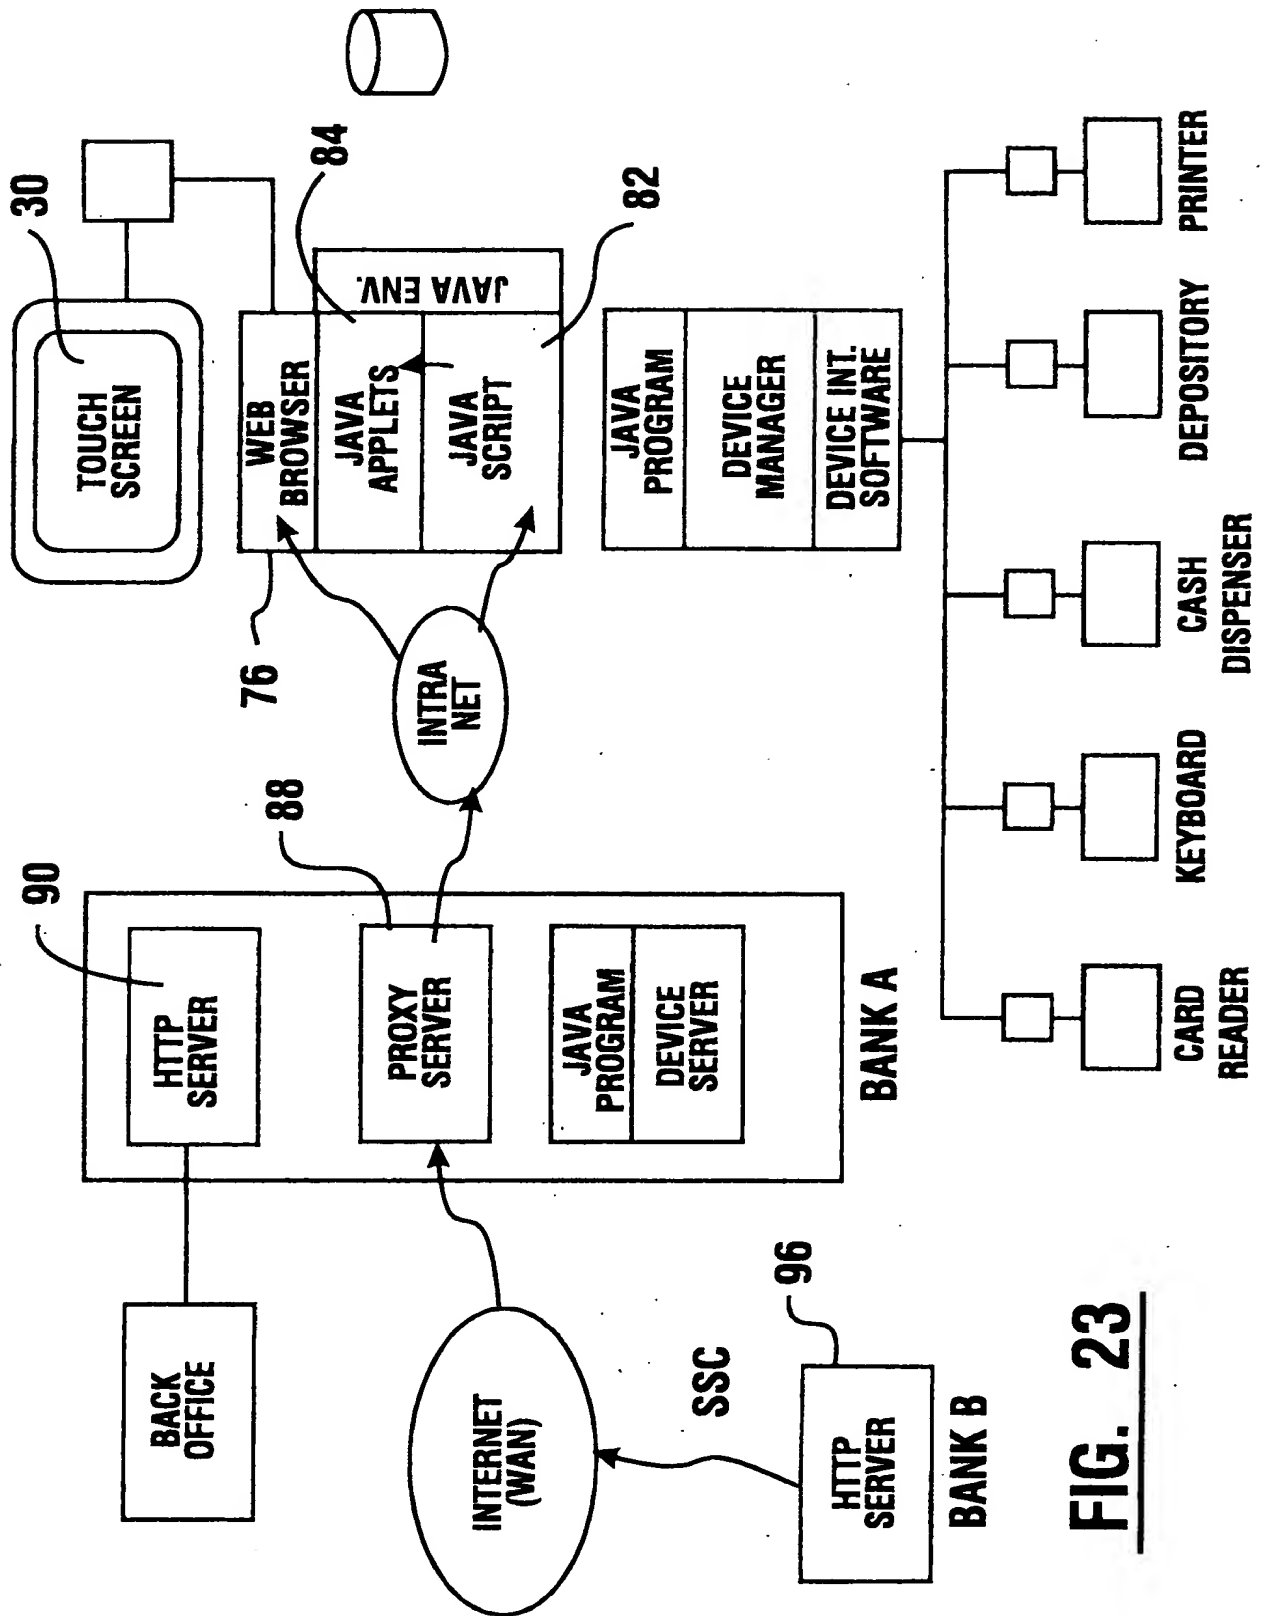


FIG. 23

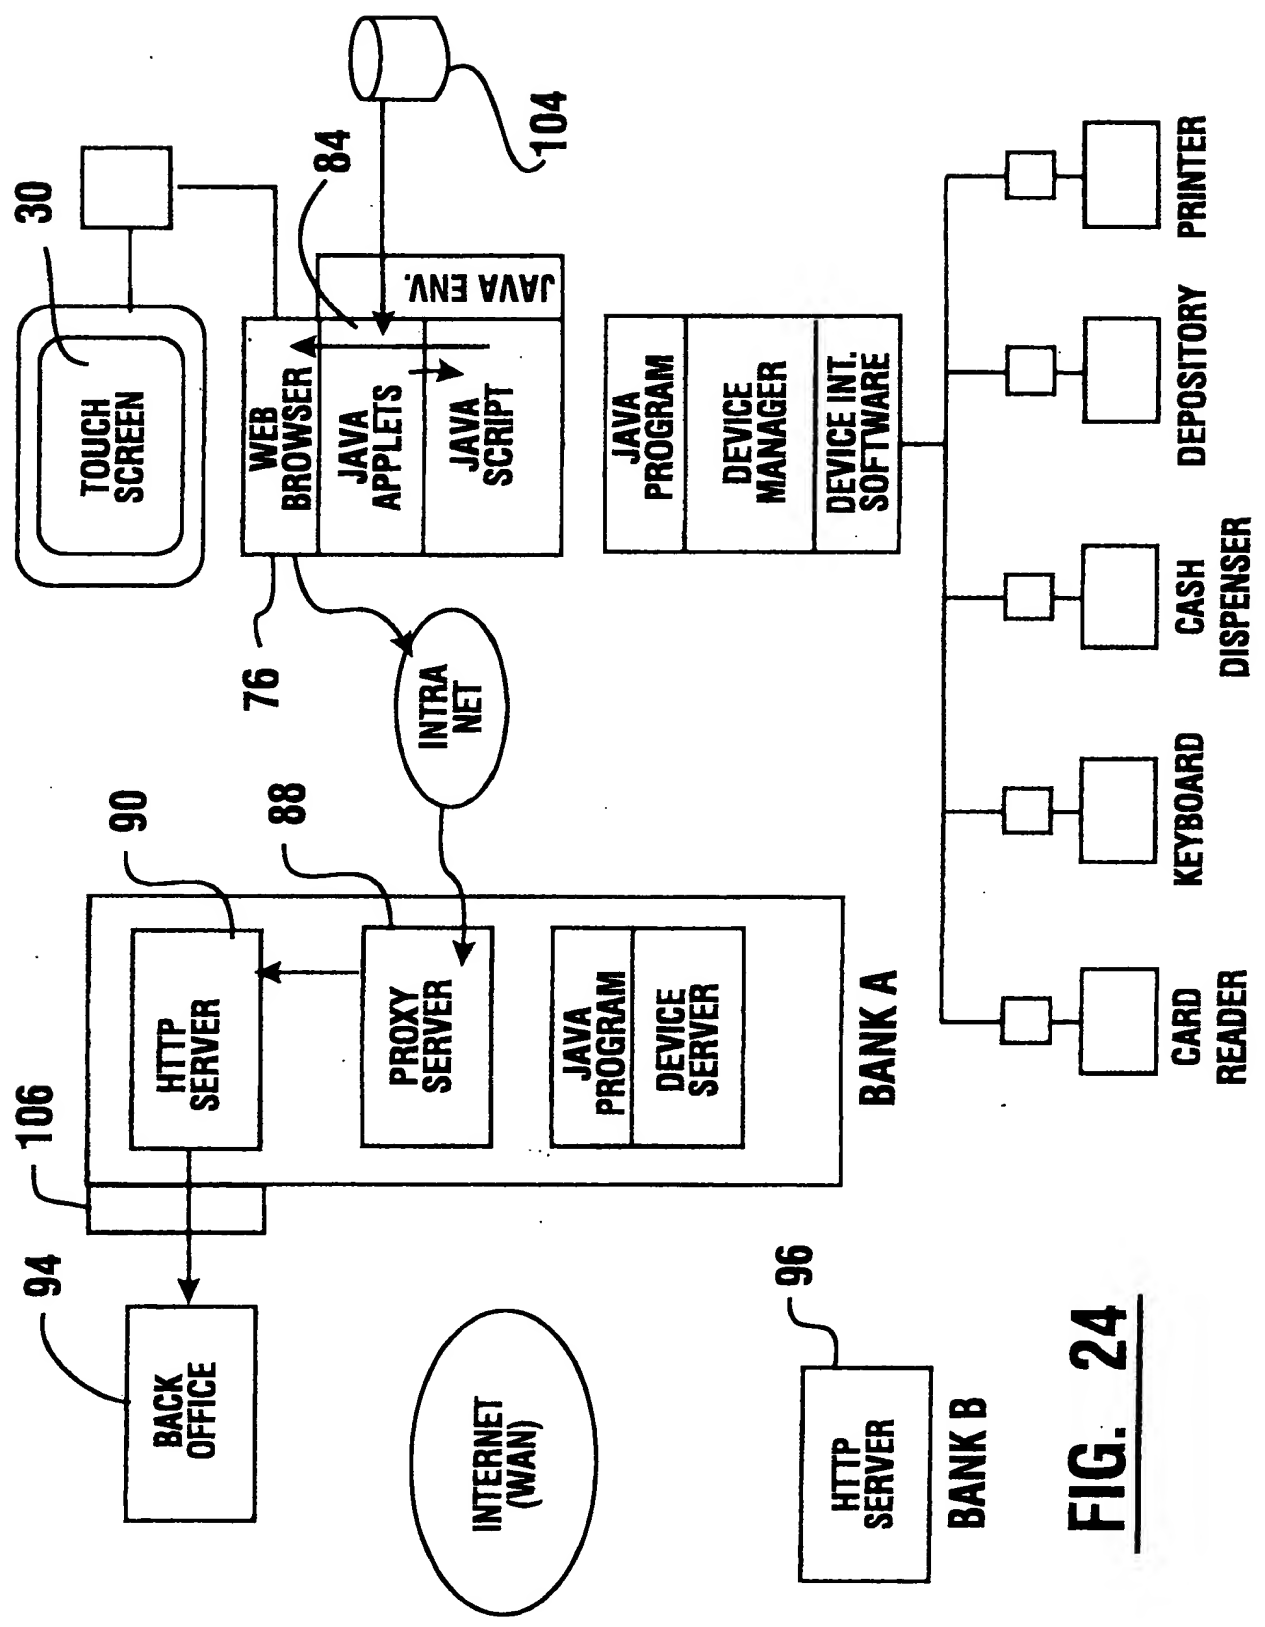
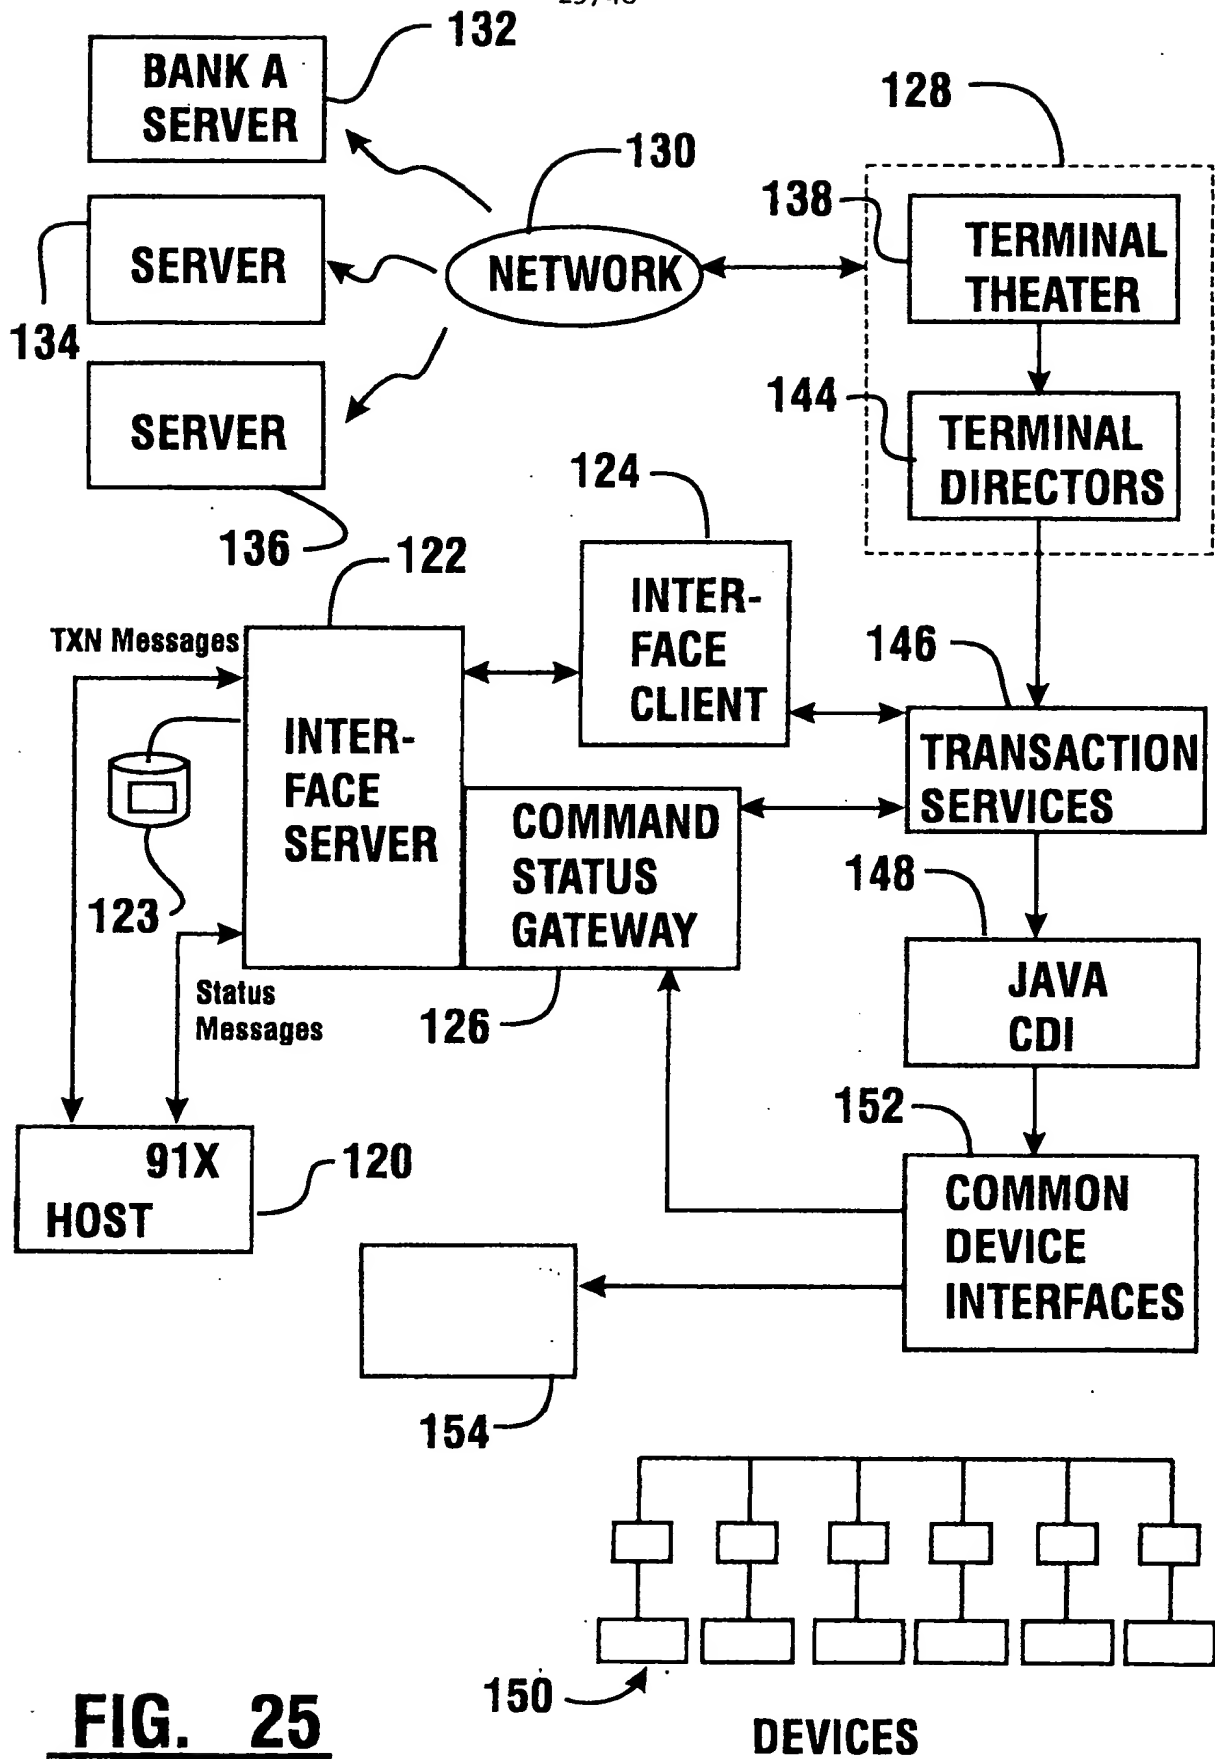
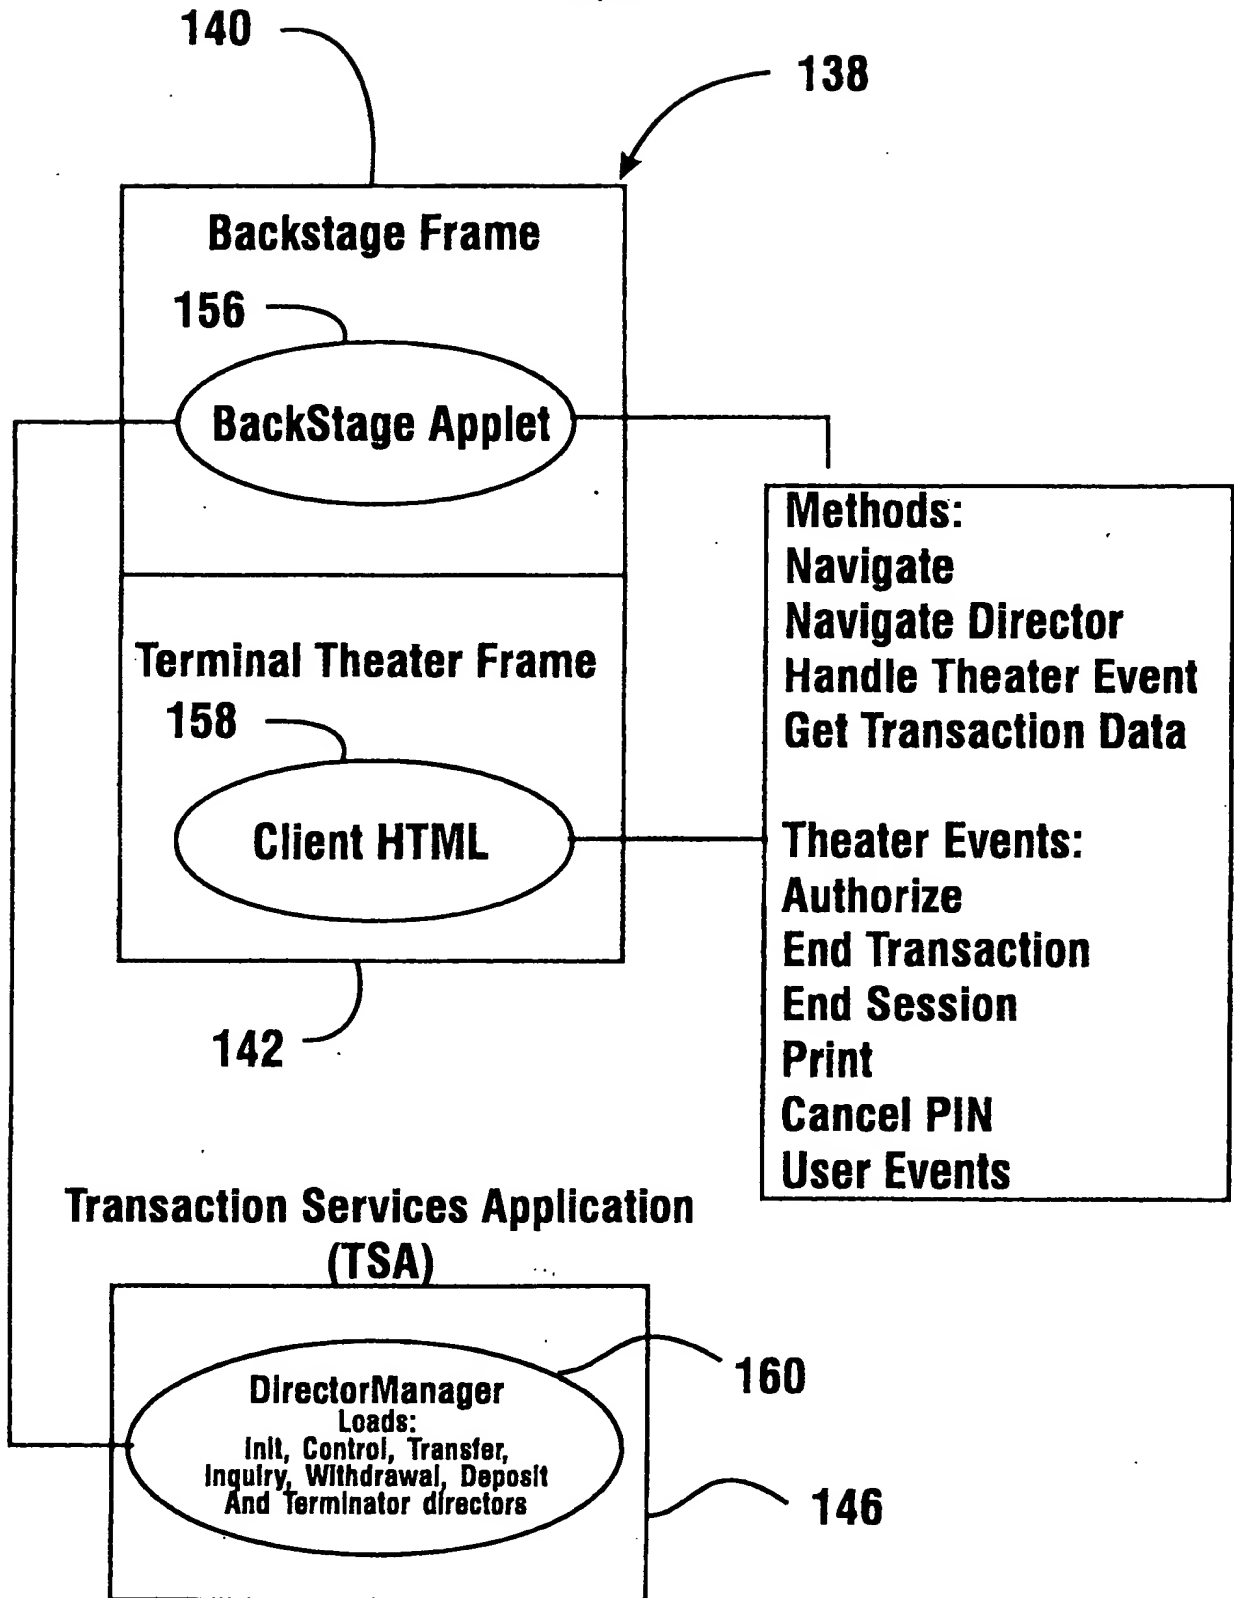
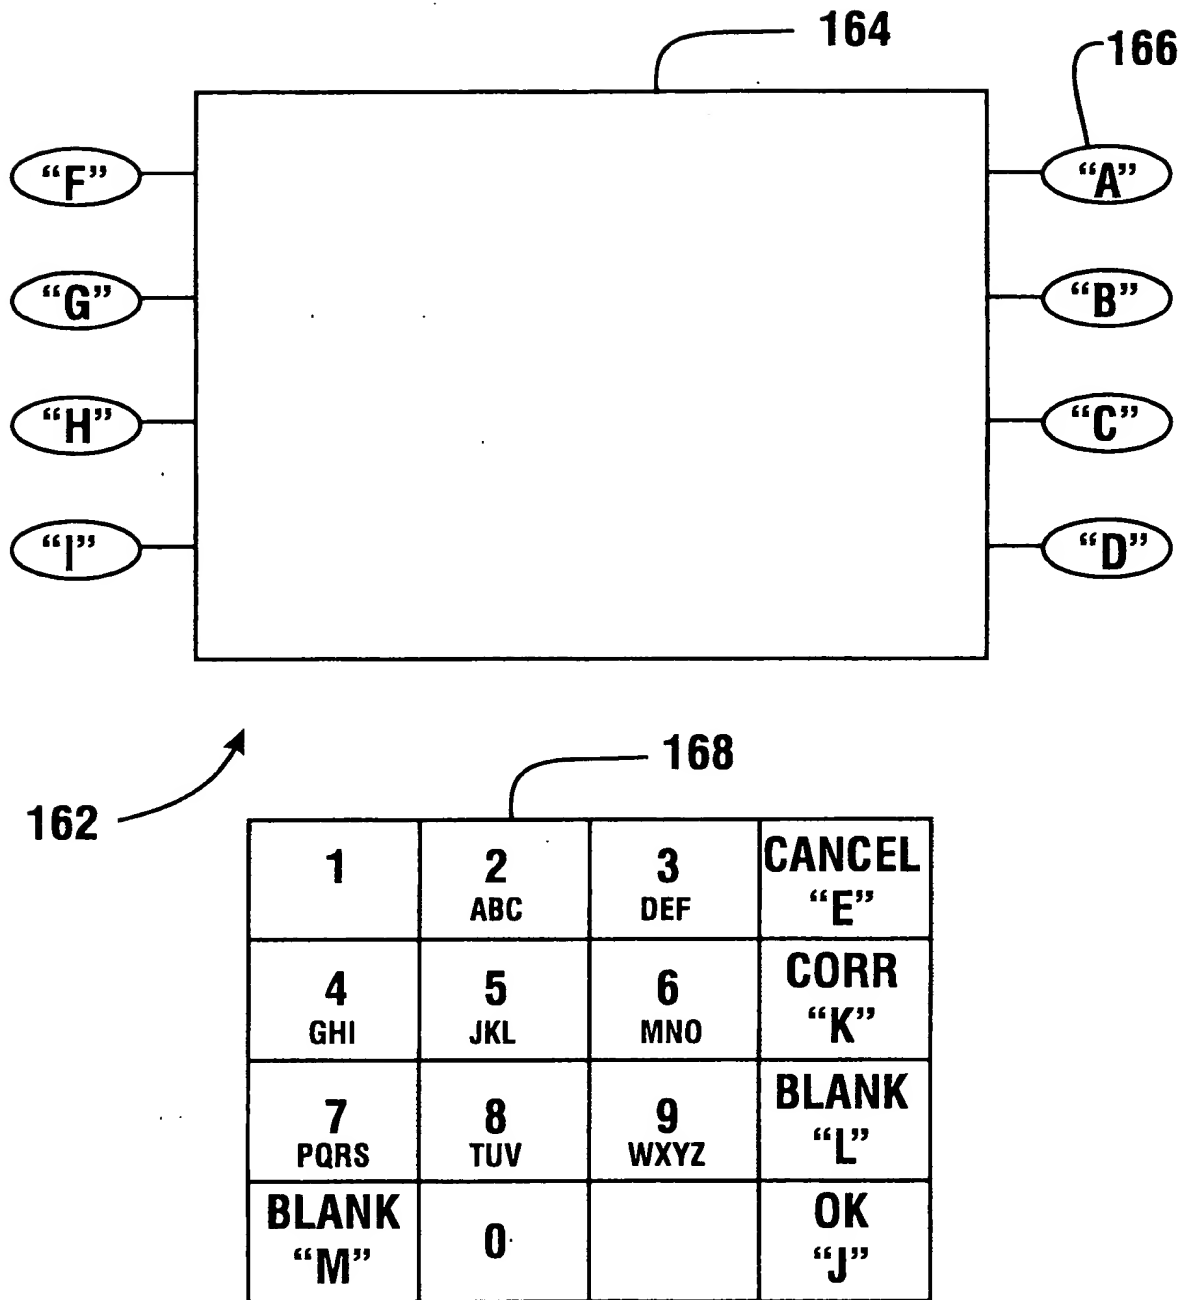
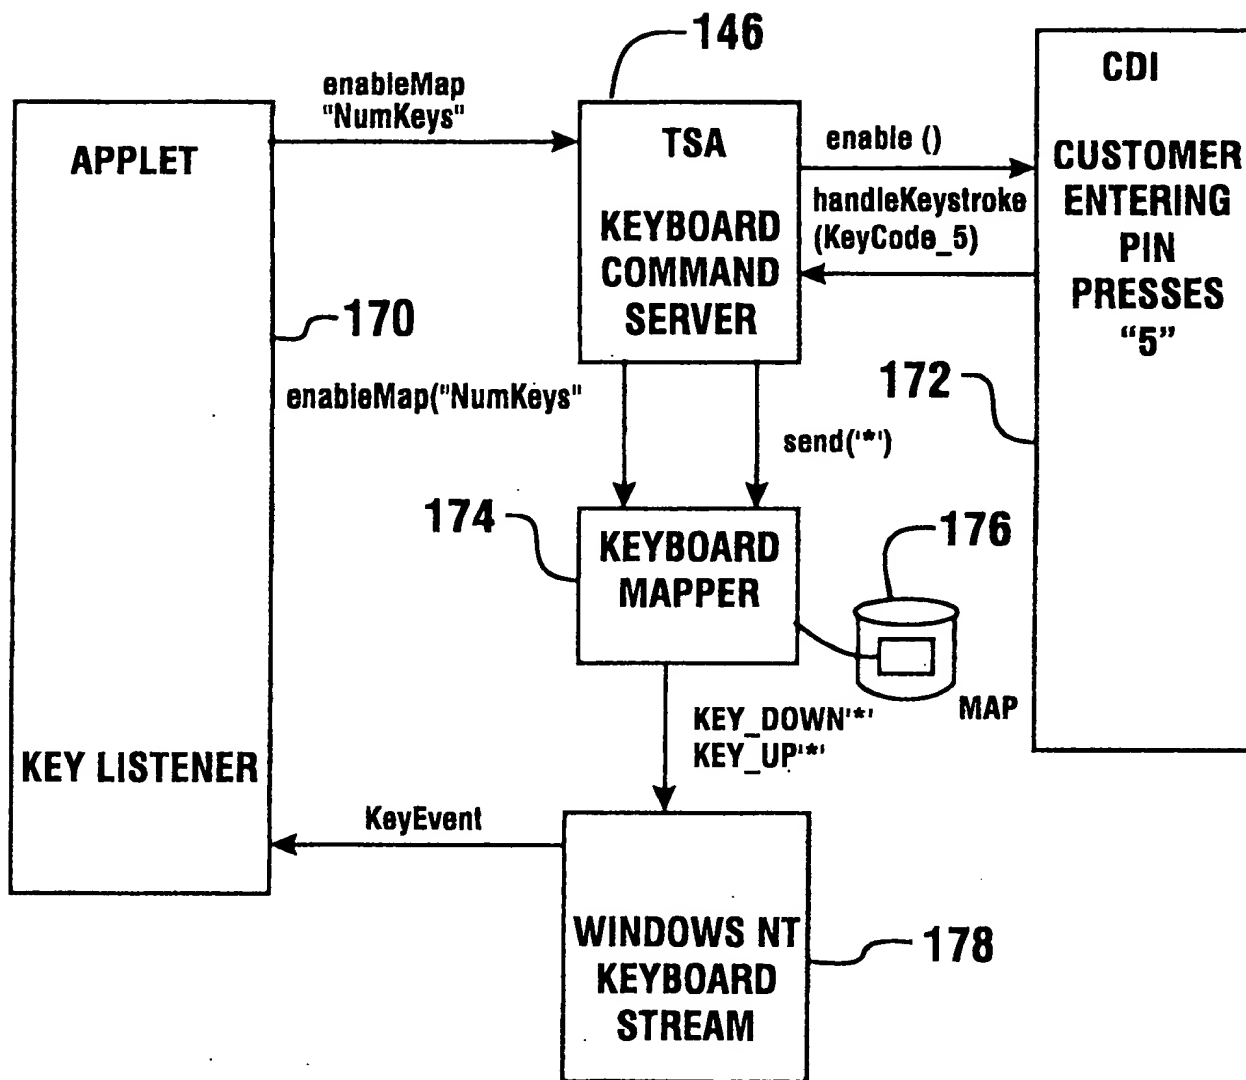



FIG. 24


**FIG. 25**


**FIG. 26**


**FIG. 27**

**FIG. 28**

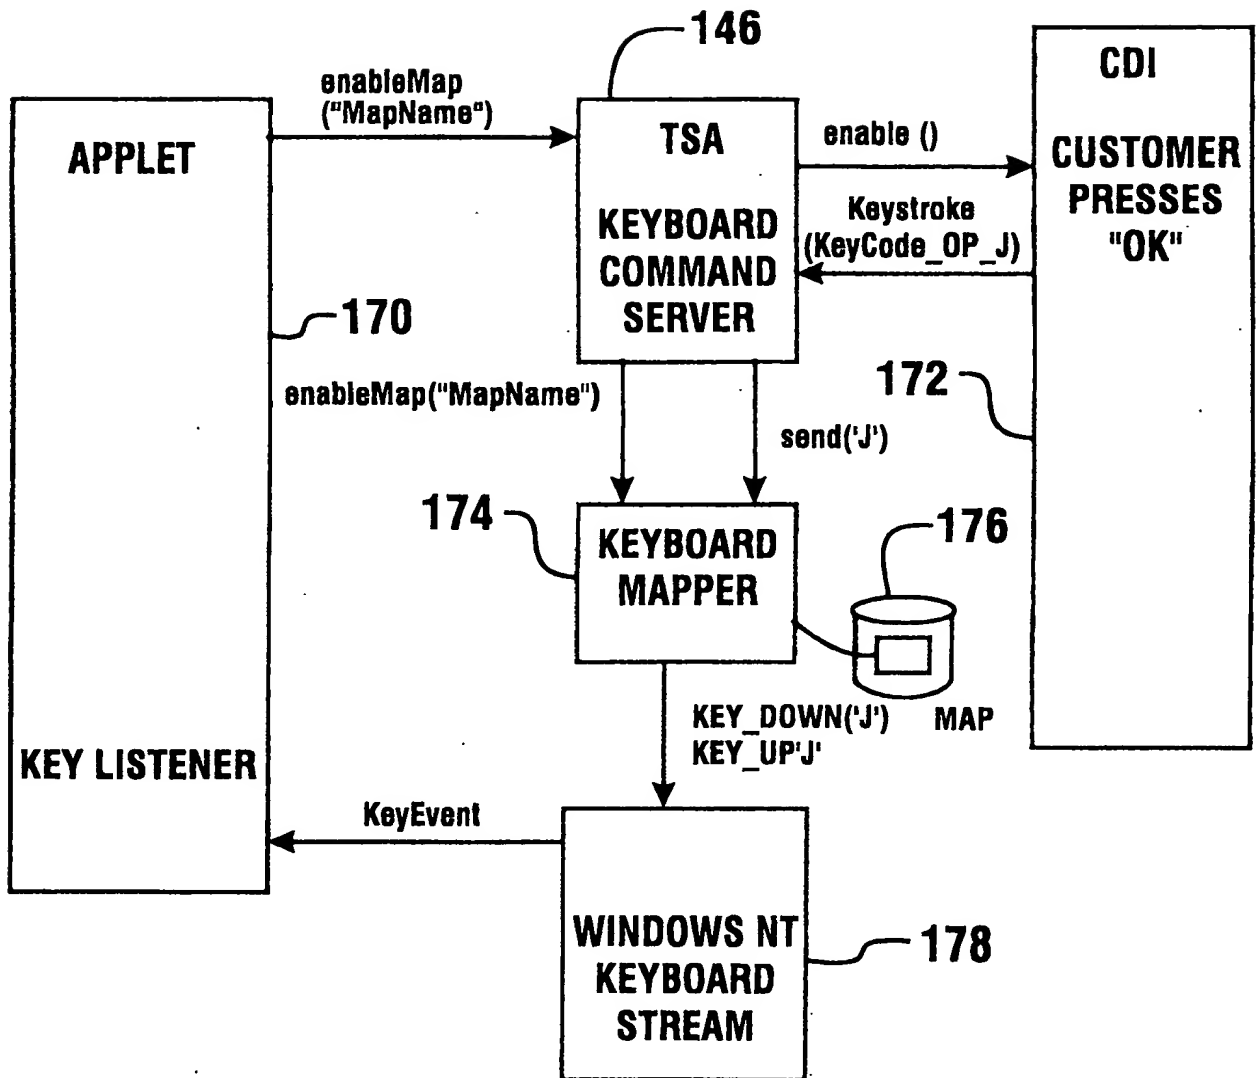**FIG. 29**

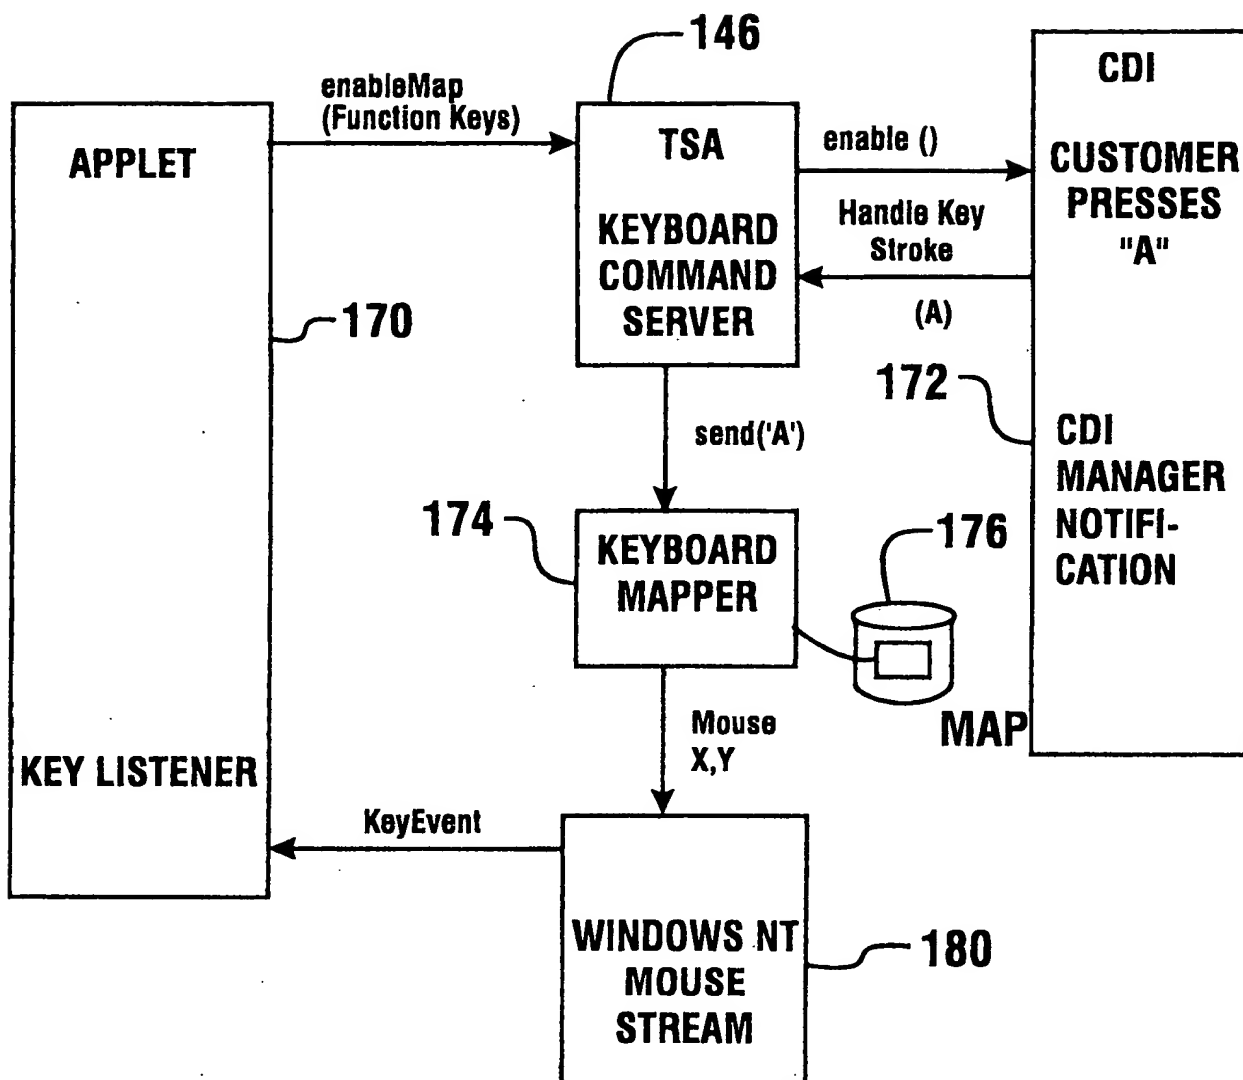**FIG. 30**

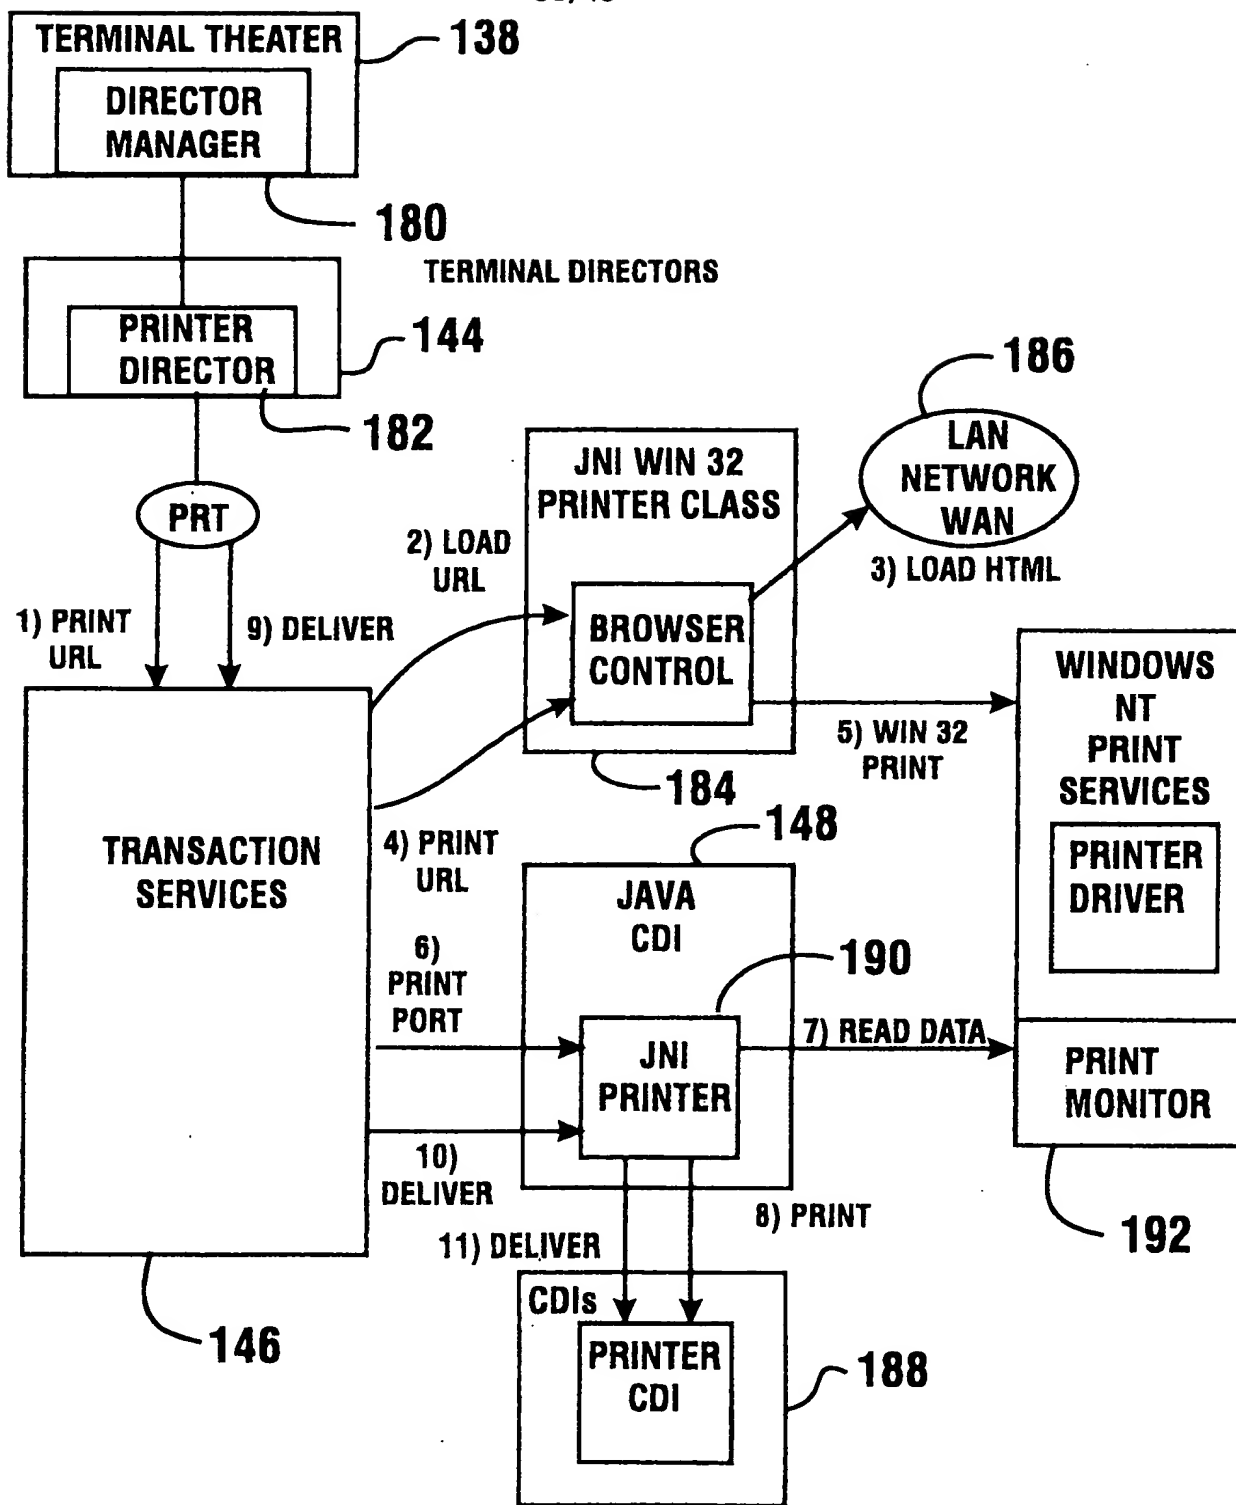
**FIG. 31**

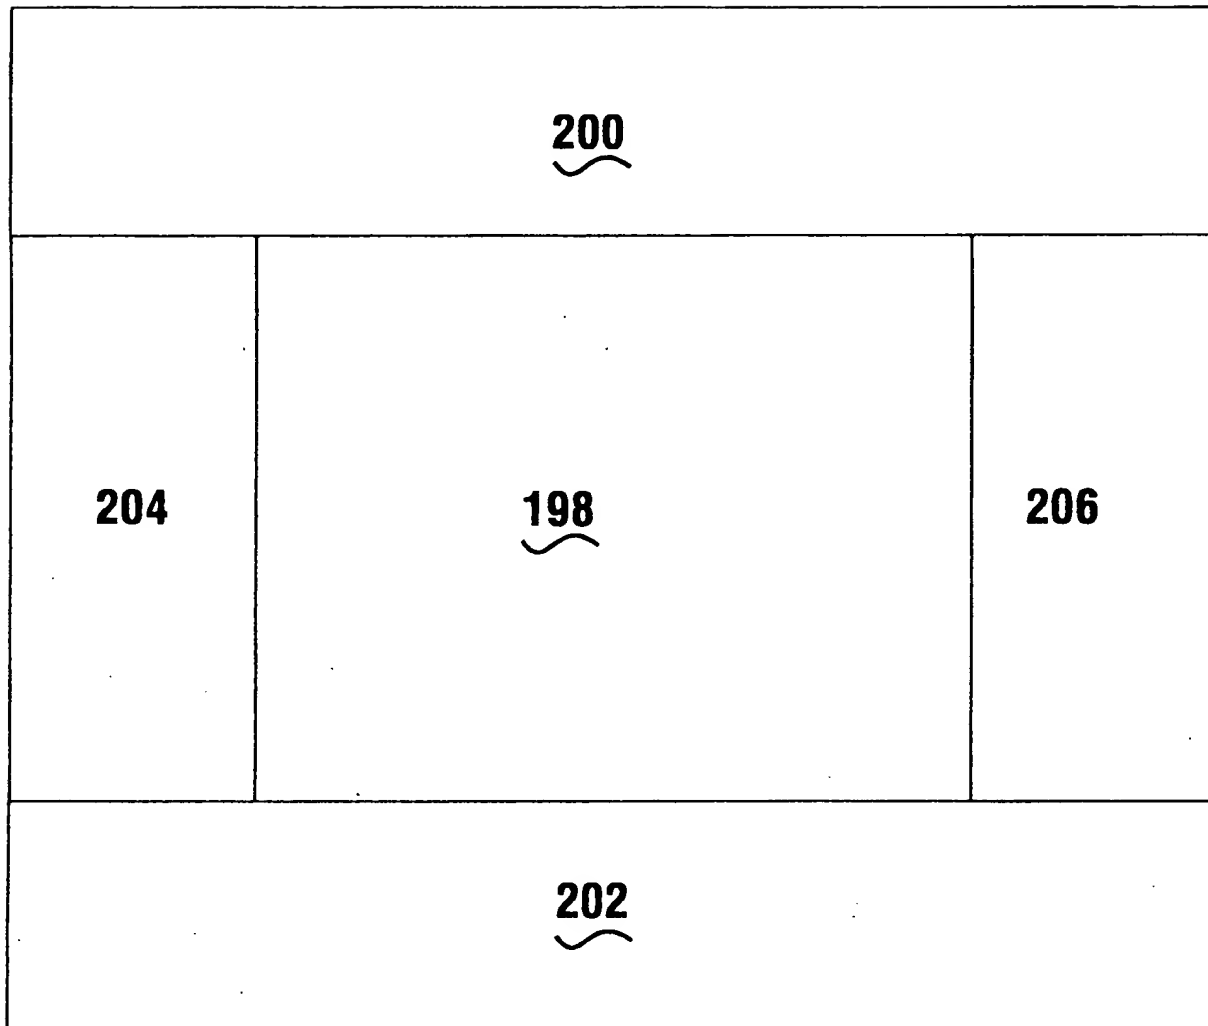

196

A curved arrow originates from the label **196** and points towards the central section **198** of the diagram.

FIG. 32

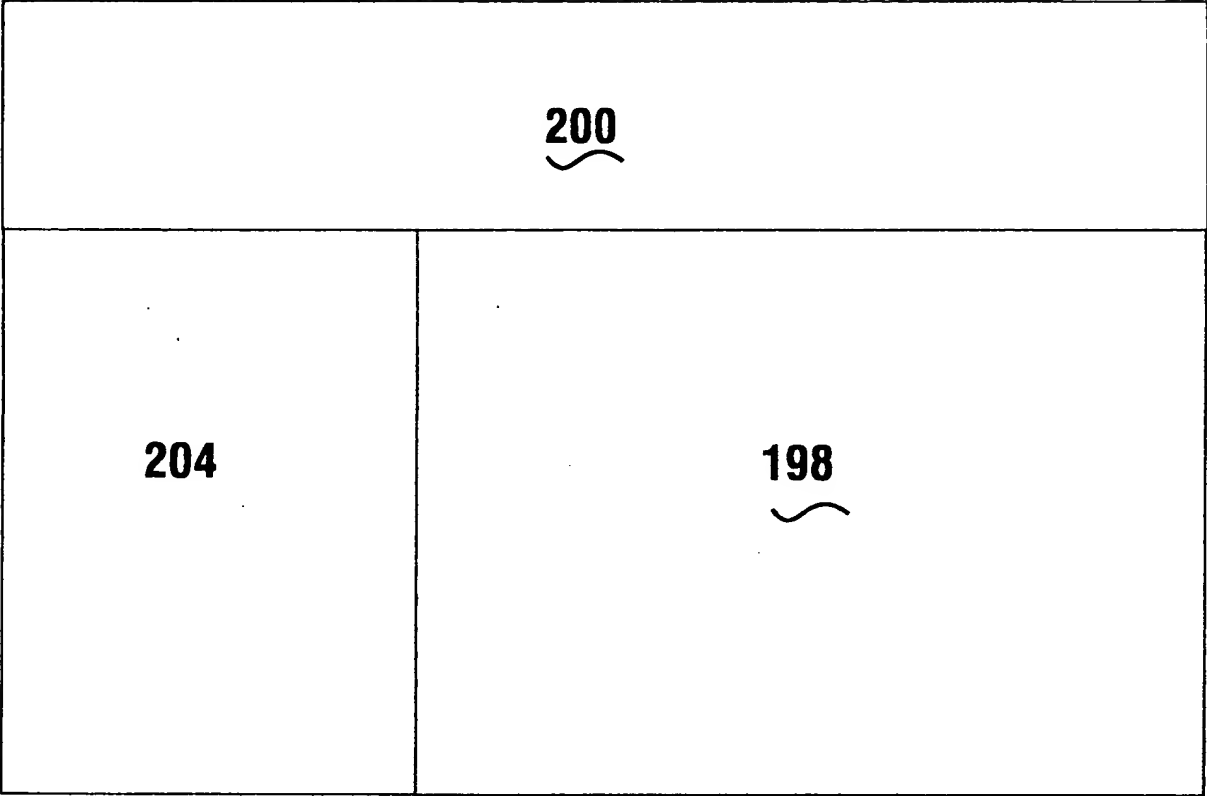

208

FIG. 33



FIG. 34

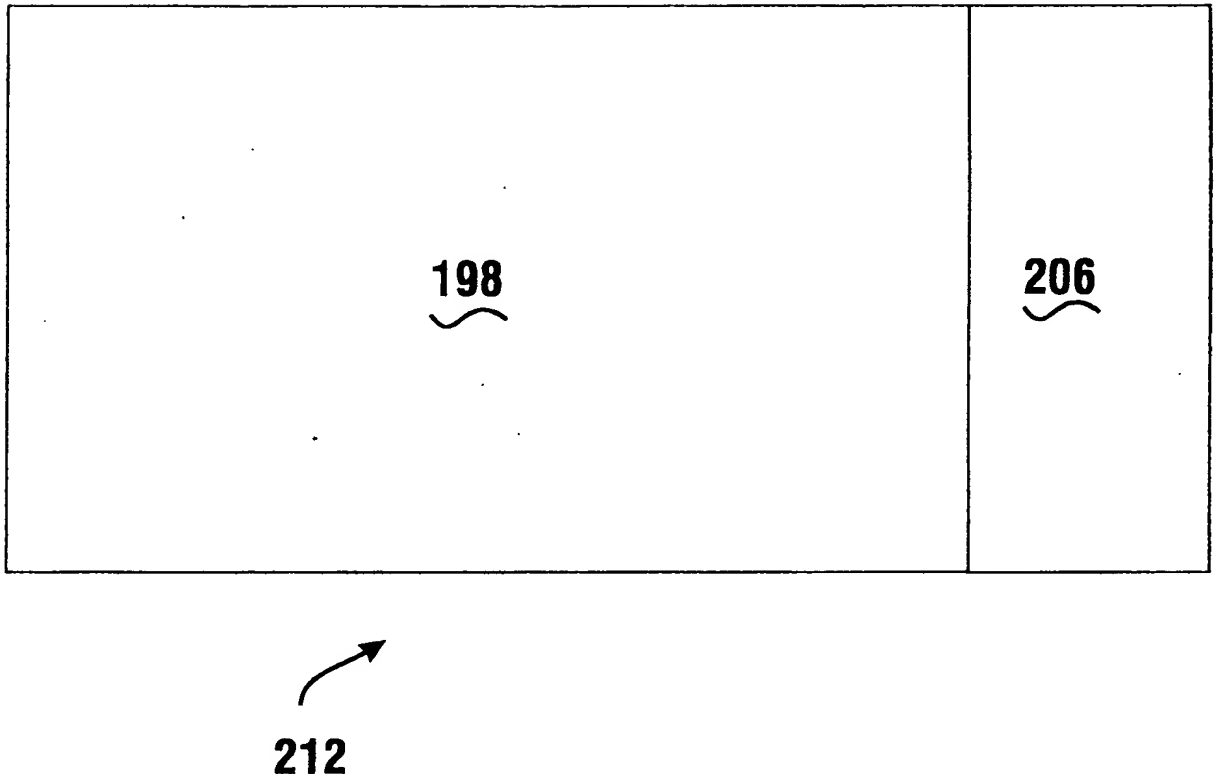
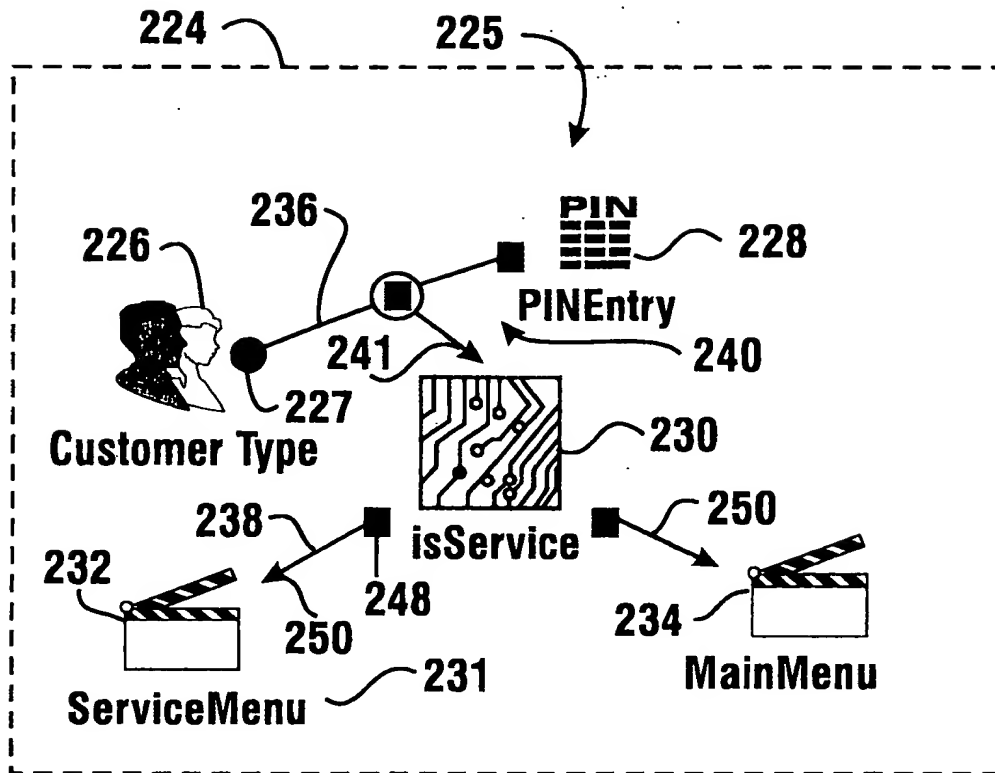


FIG. 35

**FIG. 37****242 Source Object****243 Source Event****244 Target Object****245 Target Method**

246

EVENT-TO-METHOD CONNECTION PROPERTIES

isService ["TrueEvent"] → ServiceMenu ["navigateDirector (java.lang.String,java.lang.String,int)"]

☐ Pass event data

Event

FalseEvent
this
TrueEvent

Method

BackStageControl[]
convertErrorConditions
navigate(java.lang.String,int)
navigateDirector(java.lang.String,java.lang.String,int)

☐ Show expert features

Select source event and target method for this connection.

OK **Cancel** **Reset** **Delete** **Set Parameters** **Help**

FIG. 38

258 256














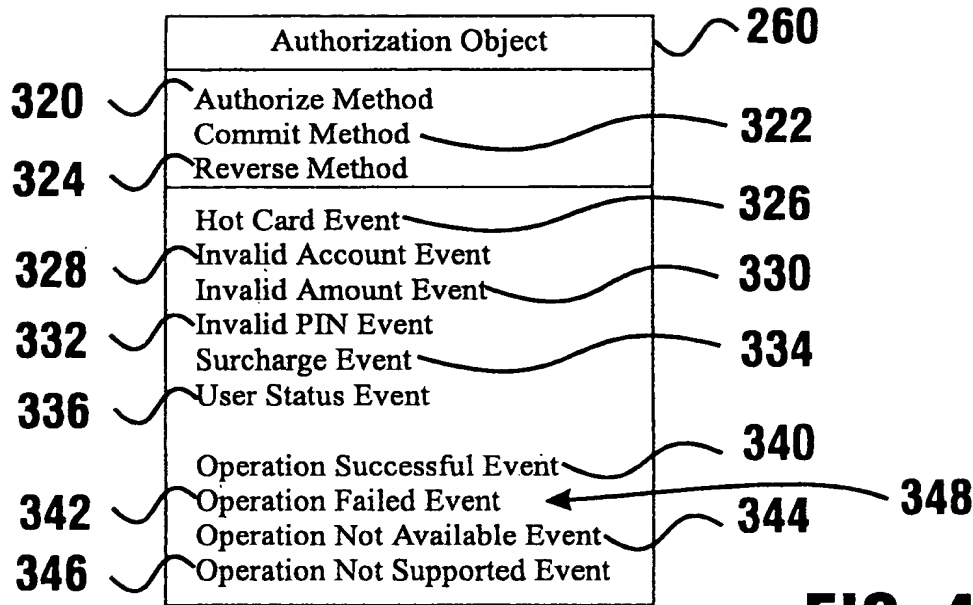
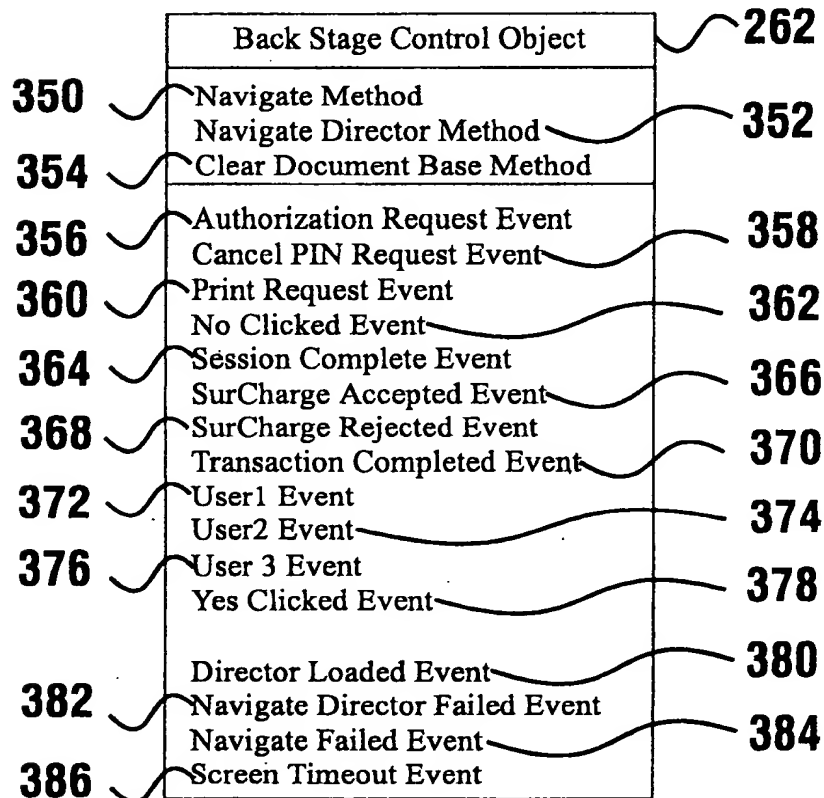
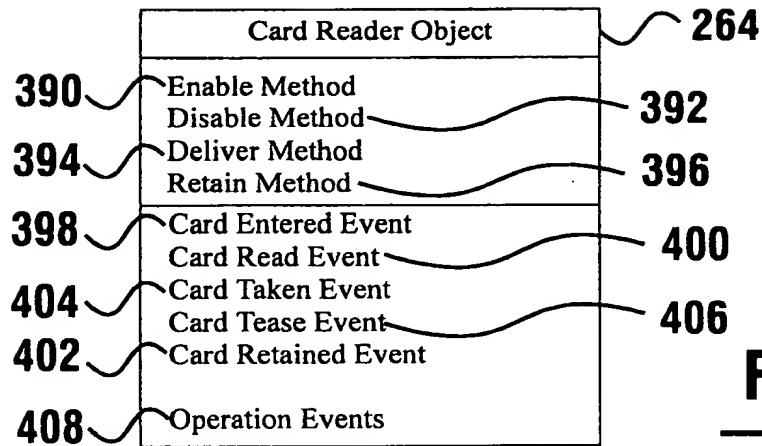
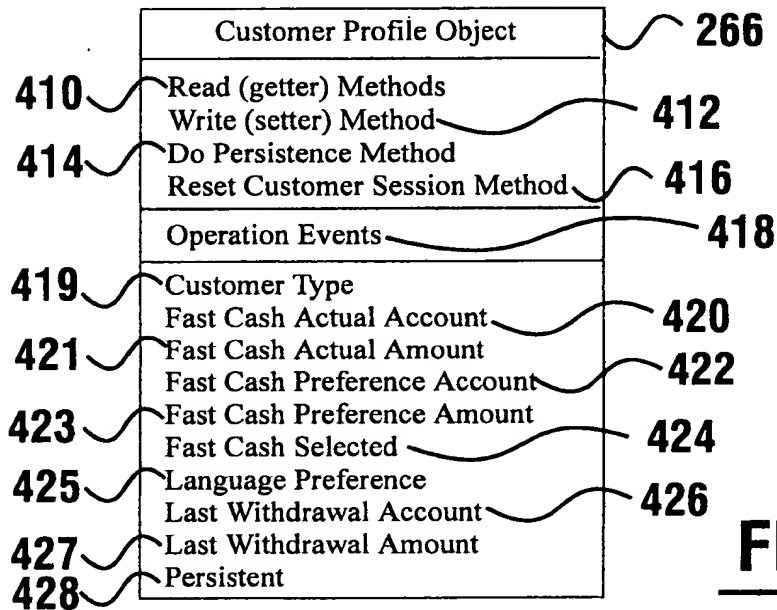
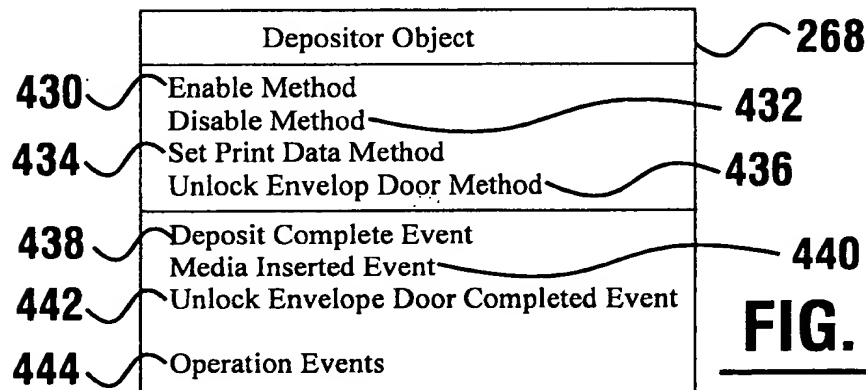
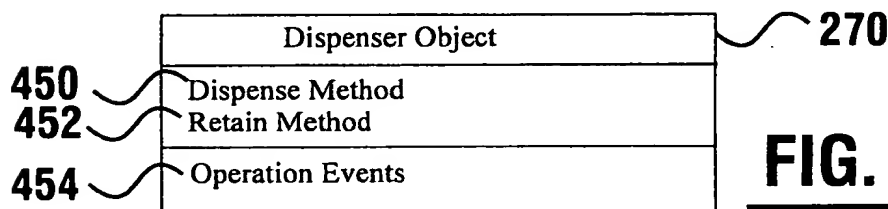
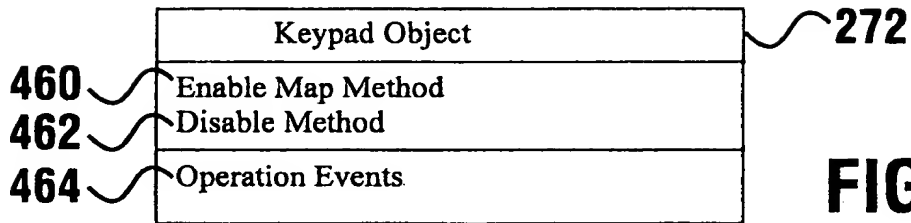
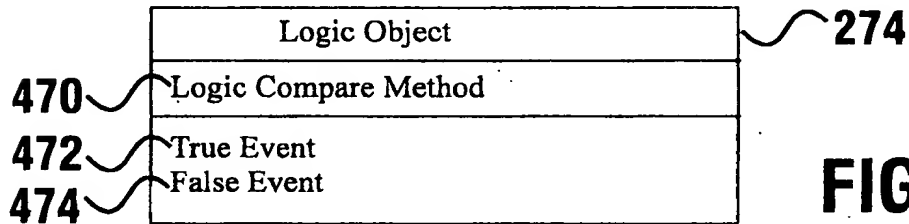
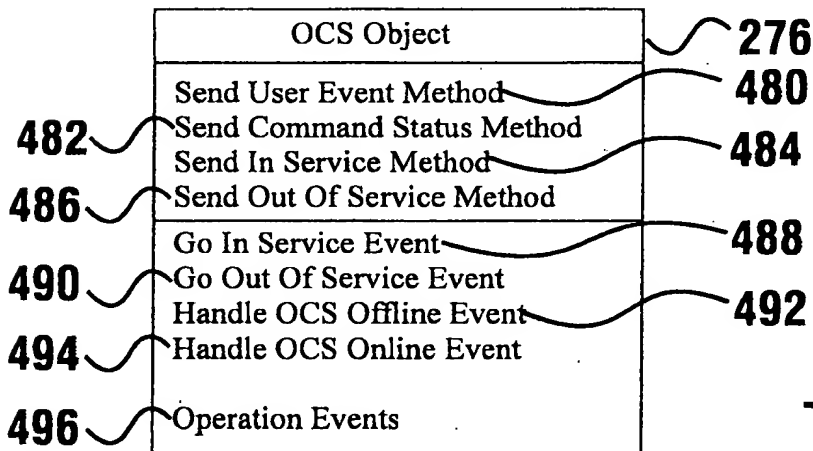
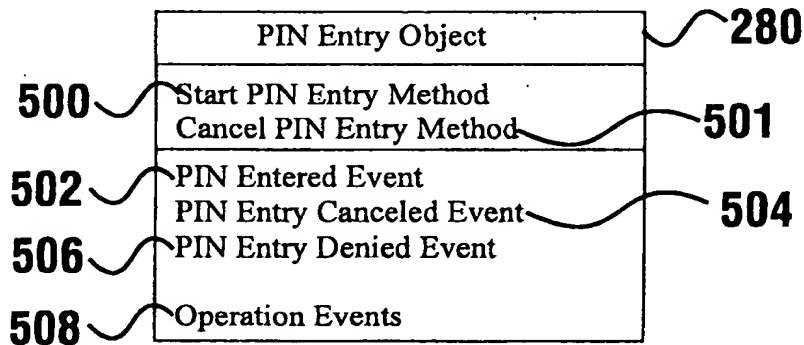
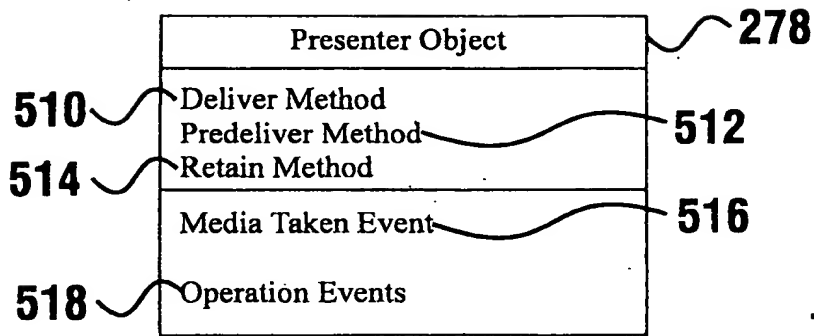
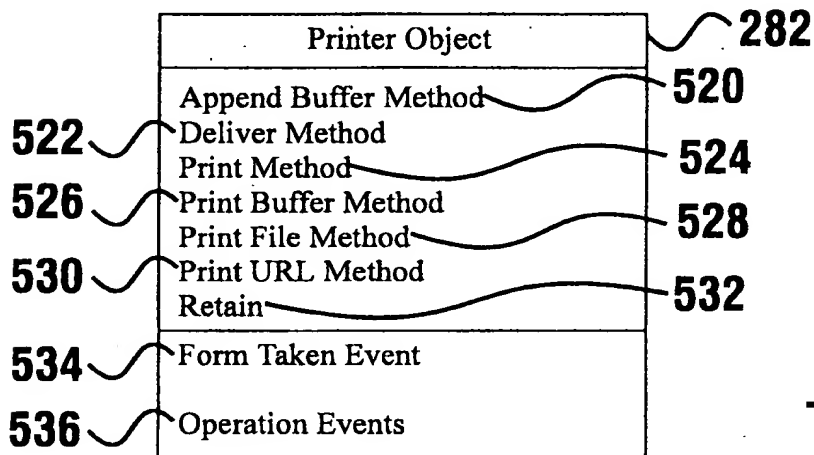
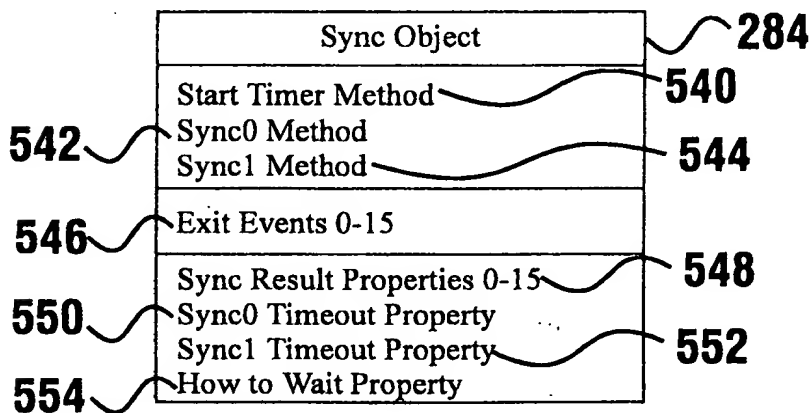
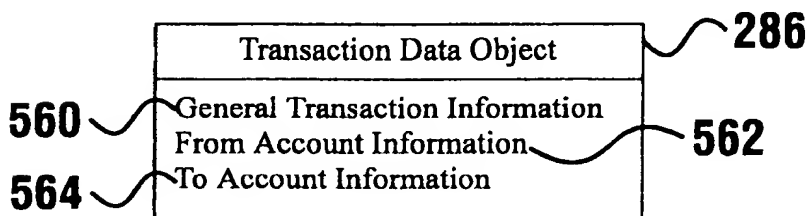
	Icon	OPTInet bean	Description
260		Authorize	Interacts with Authorization Plug-in to manage Authorization, Commit, and Reverse requests to the authorization agent.
262		BackStageControl	Uses the services of DirectorManager to control the URL property of the browser, to load directors, and to receive events from the browser.
264		CardRead	Device Control
266		Customer Profile	Interacts with the CustomerProfile Plug-ins to capture and retrieve information about a customer.
268		Depositor	Device Control
270		Dispenser	Device Control
272		Keypad	Device Control
274		Logic bean	Determines the truth value of comparisons between two operands.
276		OCS bean	Interacts with the OCS Server and the Command/Status Plug-in so that host commands and host command responses can be processed by directors.
278		Presenter	Device Control
280		PINEntry	Interacts with the PINEntryEvent Server to manage the PIN Entry mode.
282		Printer	Device Control
284		Sync	Synchronizes two forked processing paths and provides a timer for one or two processing paths.
286	NAME: ACCT: ADDR: AMOUNT: DATE:	TransactionData	Provides a repository of data that can be shared among directors, the browser, and the authorization agent.

FIG. 39

**FIG. 40****FIG. 41**

**FIG. 42****FIG. 43****FIG. 44****FIG. 45**

**FIG. 46****FIG. 47****FIG. 48****FIG. 49**

**FIG. 50****FIG. 51****FIG. 52****FIG. 53**

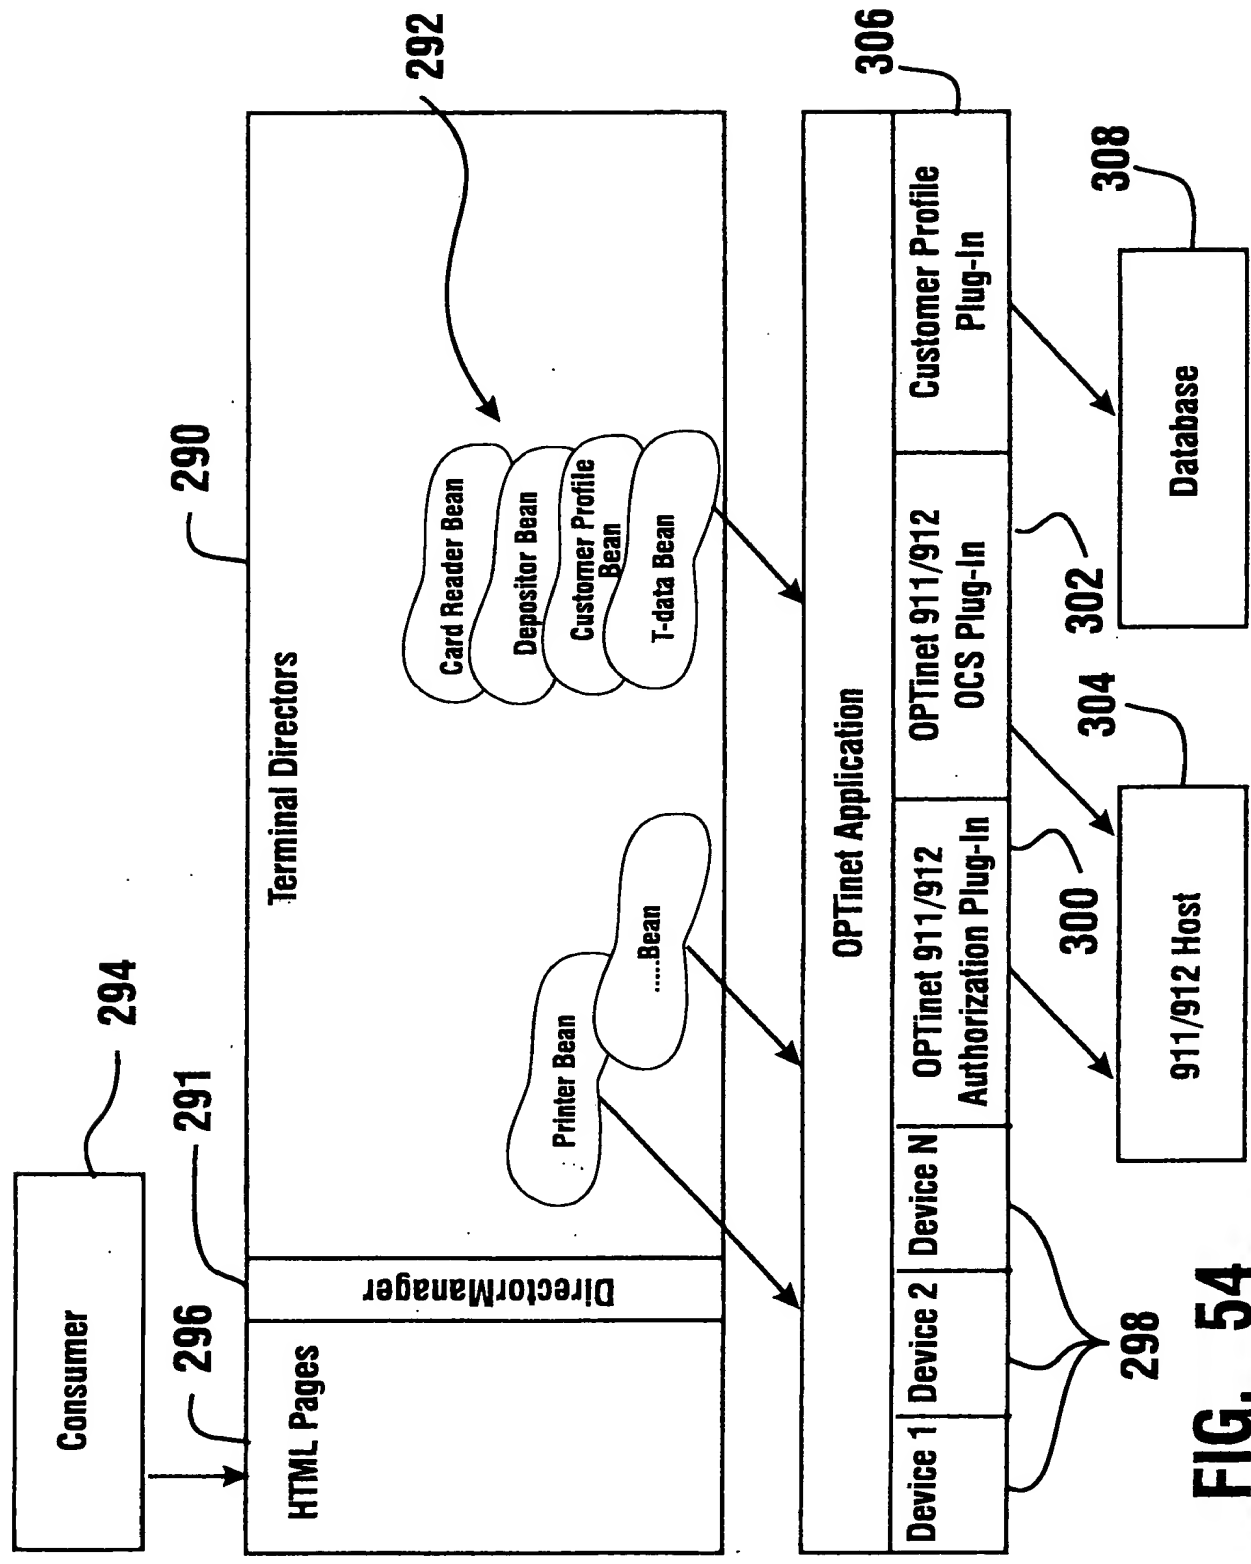
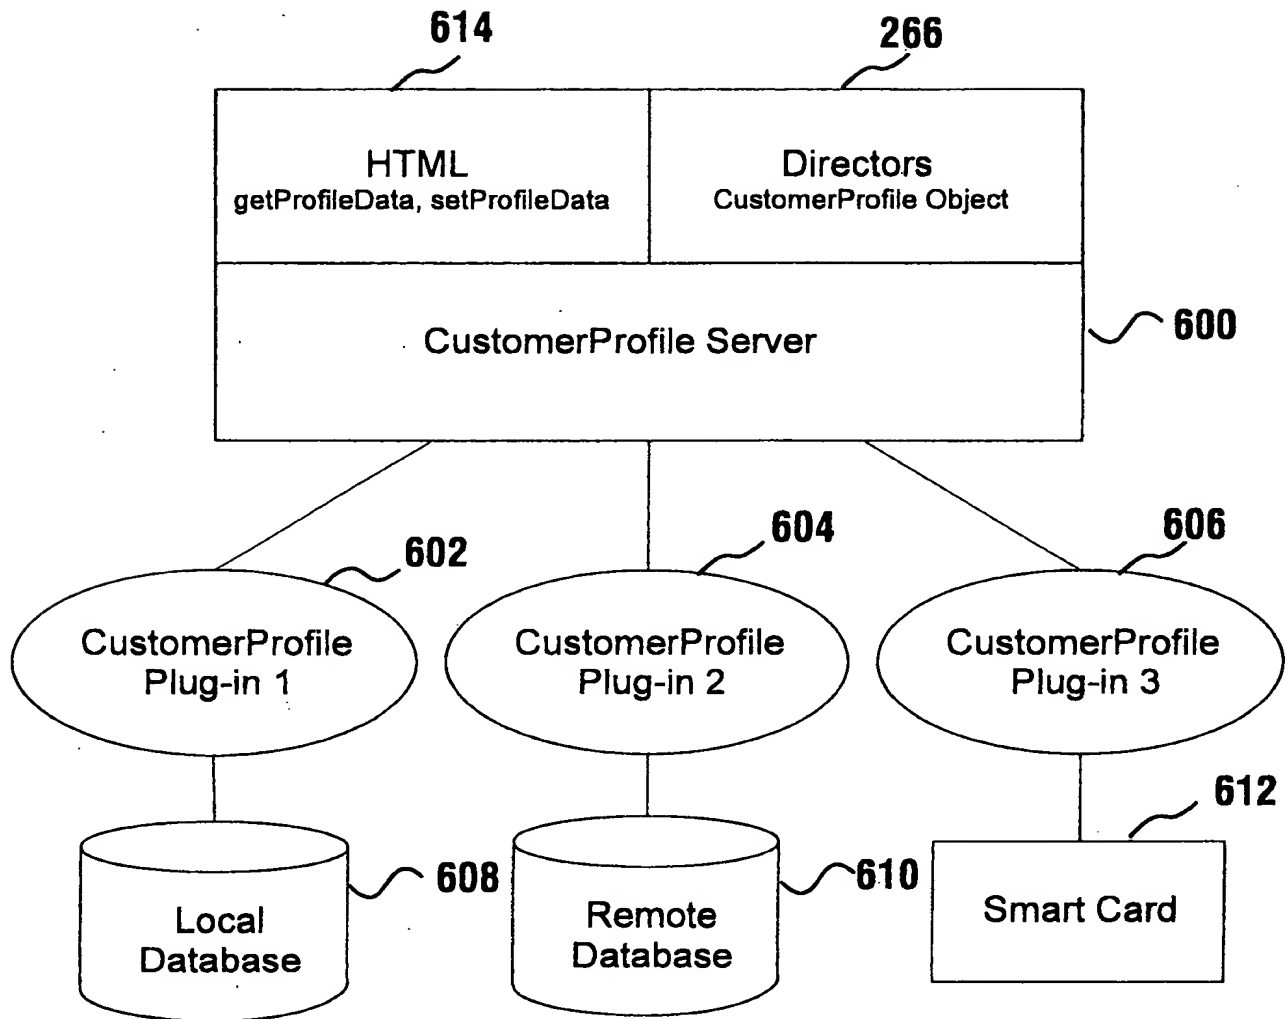
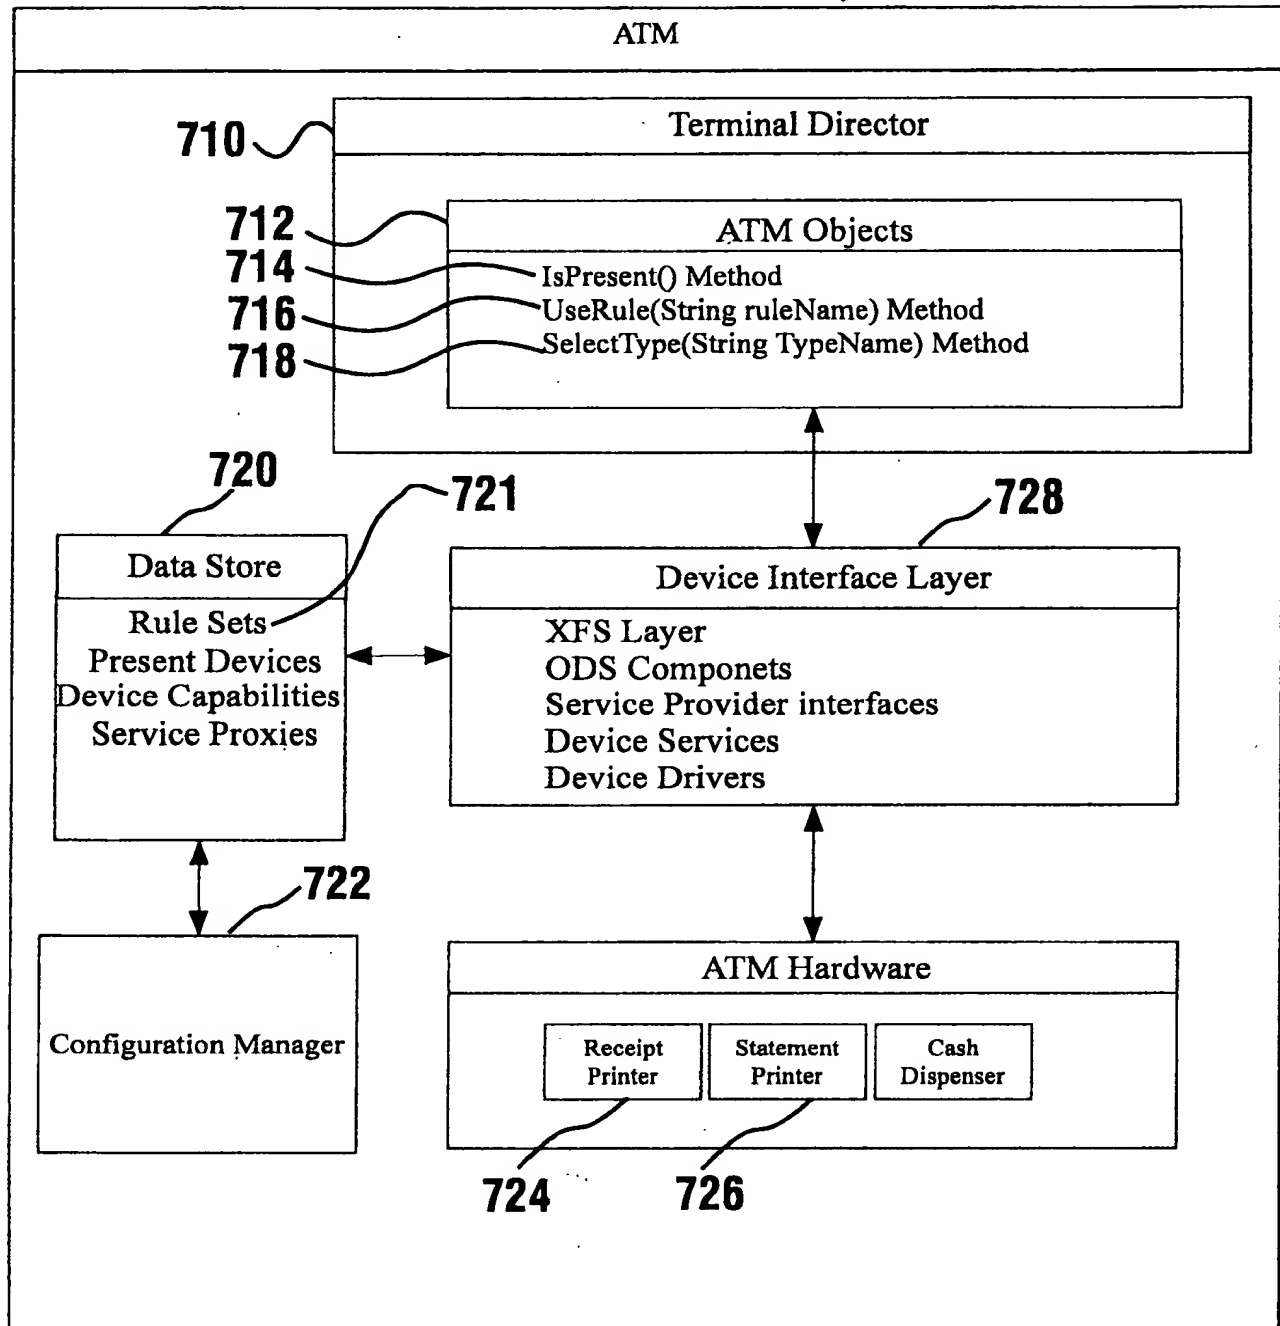
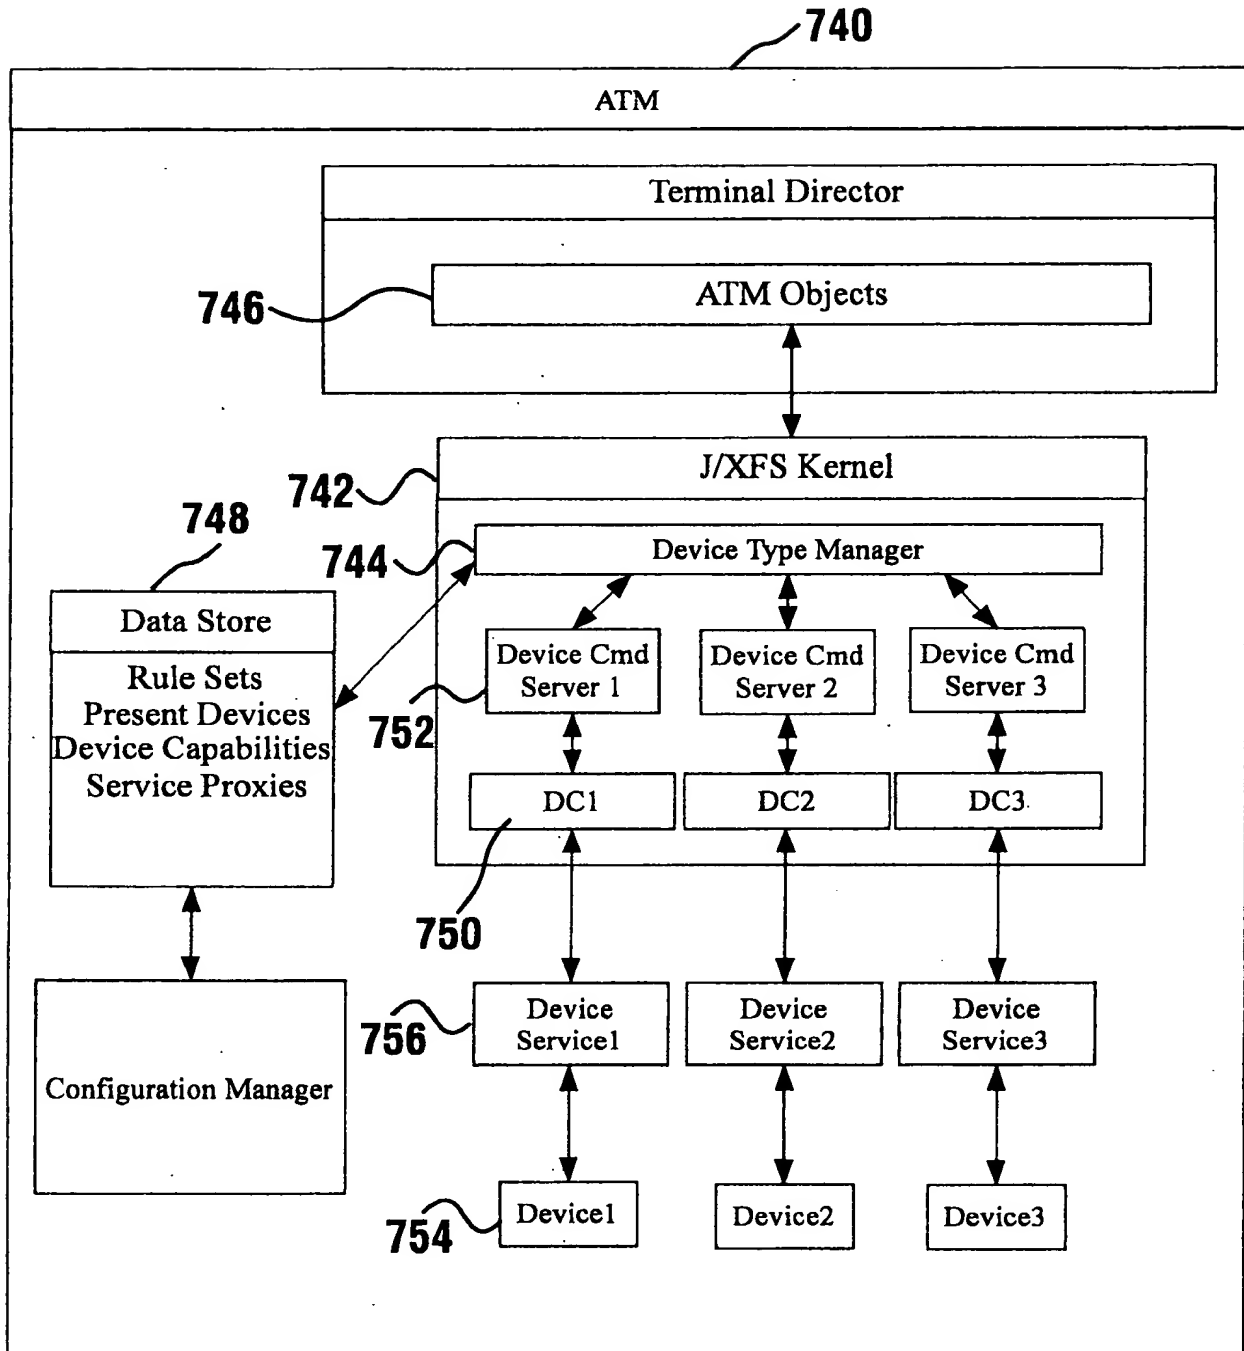



FIG. 54


**FIG. 55**

700

**FIG. 56**

**FIG. 57**

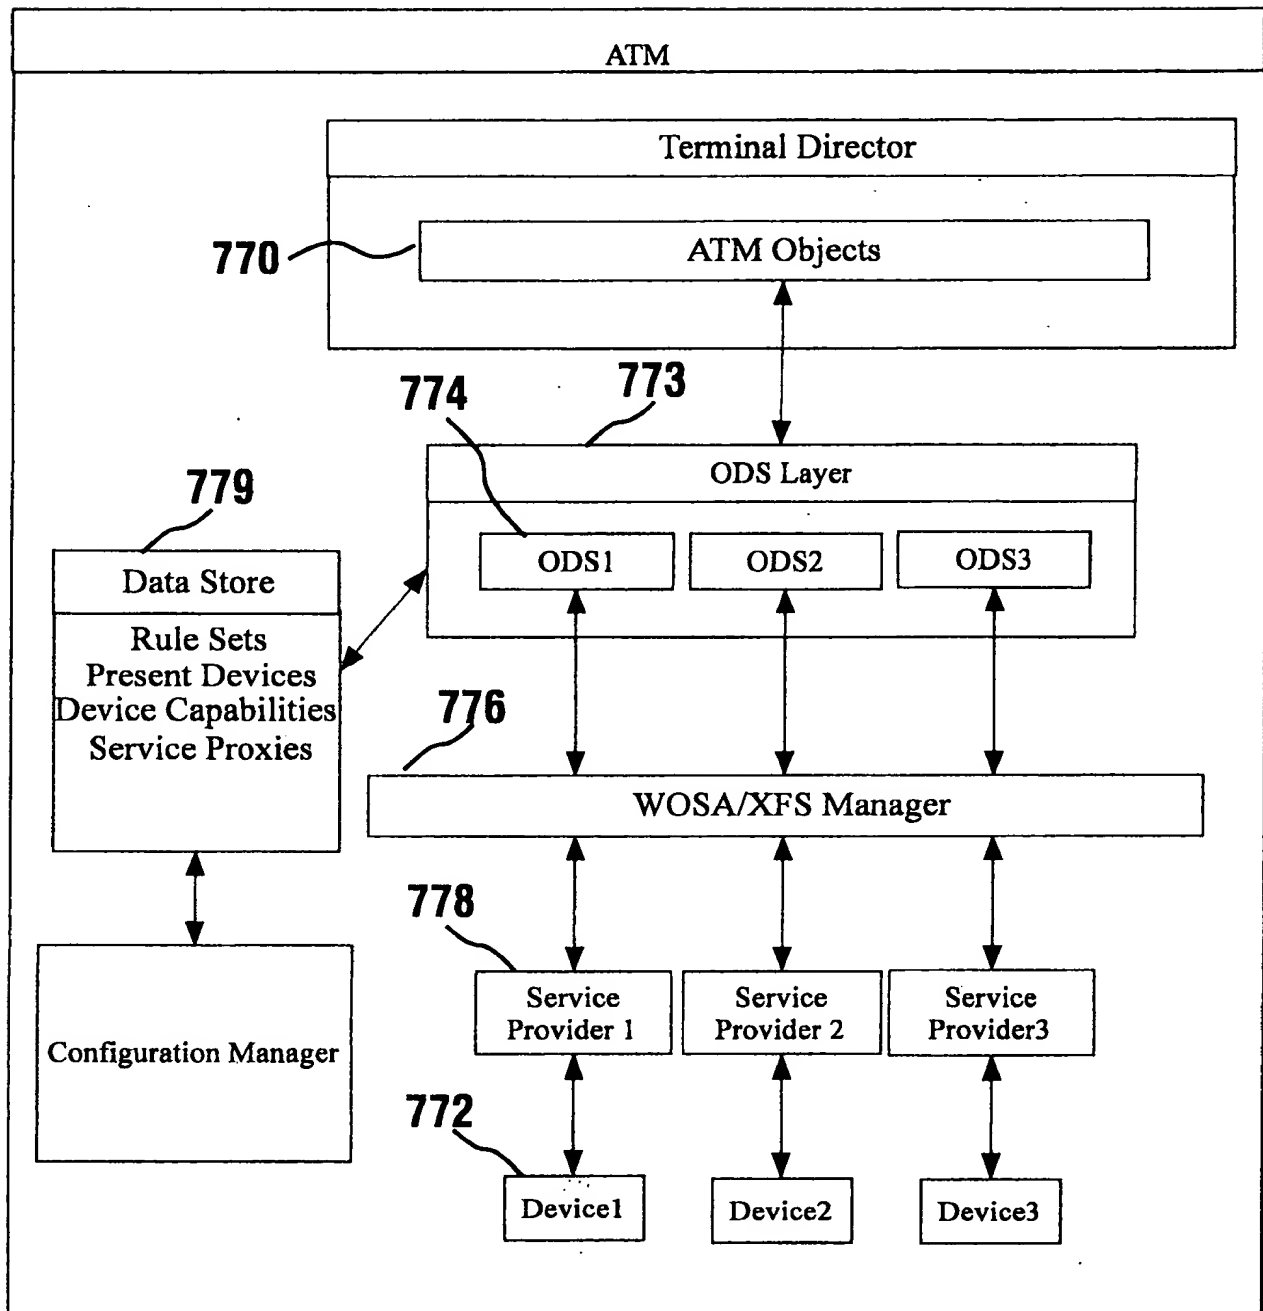**FIG. 58**

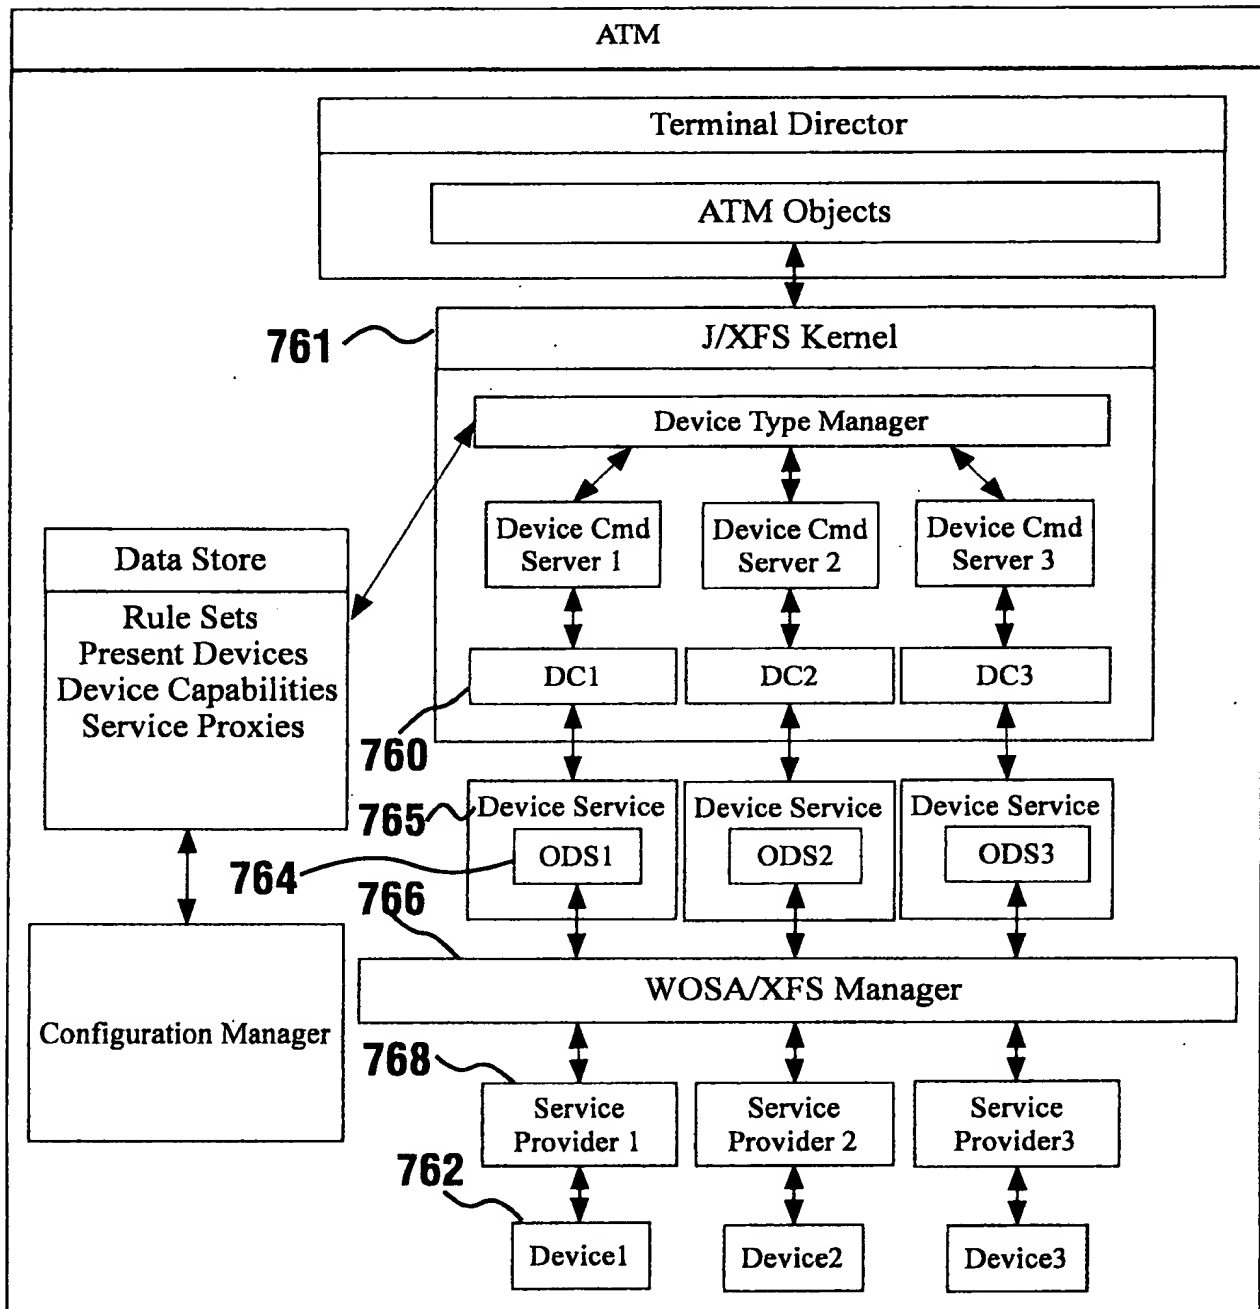**FIG. 59**